

<u>Belmont</u>™

SINGLE HOLE LAV / VESSEL / BAR FAUCET


Features

- Available in 28 finishes including 13 PVD finishes
- All brass construction
- 4-9/16" spout center to center
- Single handle operation cartridge with ceramic disc
- Flexible braided hoses for ease of installation
- Flush mount aerator insert
- 1.2 gpm (4.5 L/min) max flow rate

Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
 NSF/ANSI 61 & NSF/ANSI 372
- CEC / DOE
- Commonwealth of MA
- EPA WaterSense High Efficiency Lavatory
- ADA compliant




3501-2





3501-2-HXX (XX = Optional Series Handle)

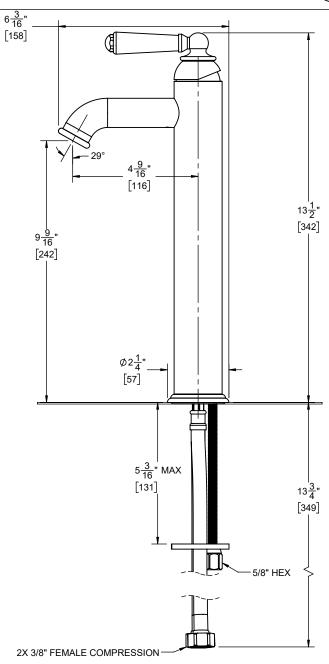

THROUGH-HOLE SPECIFICATIONS

<u>MIN</u> SPOUT: Ø1-1/4"

RECOMMENDED Ø 1-3/8"

DIMENSIONS SHOWN TO NEAREST 1/16" [DIMENSIONS SHOWN TO NEAREST 1mm]



<u>Belmont</u>™

SINGLE HOLE LAV / VESSEL / BAR FAUCET

