INSTALLATION INSTRUCTIONS

Equility[™](Formerly LYNDON®) Handle Trim Kit for 2-Way or 3-Way In-Wall Diverter

Model D35109430

To be used with

D35000420.191 - 3/2 Two Way In-Wall Diverter

D35000430.191 - 4/3 Three Way In-Wall Diverter

Thank you for selecting DXV. To ensure that your installation proceeds smoothly, please read these instructions carefully before you begin.



Ш

S


ш

 α

 α

Ш

⋖



RECOMMENDED TOOLS AND MATERIALS

Most of the procedures require the use of common tools and materials, which are available from hardware and plumbing supply stores. It is essential that the tools and materials be on hand before work is begun.








Flat Blade Screwdriver

Phillips Screwdriver

Plumbers' Putty or Caulking

ROUGHING-IN DIMENSIONS:

• For reference

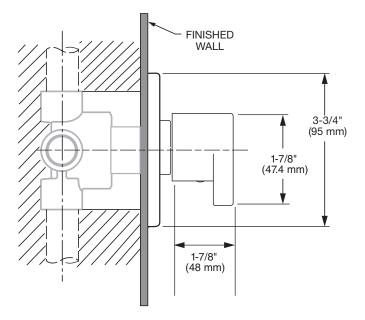

In the United States:

DXV

One Centennial Avenue Piscataway, New Jersey 08855 Attention: Director of Customer Care

For residents of the United States, warranty information may also be obtained by calling the following toll free number: (800) 227-2734 www.DXV.com

In Canada:

DXV 5900 Avebury Road Mississauga, Ontario L5R 3M3 Canada

Toll Free: 1-800-387-0369 Local: 905-306-1093 Fax: 1-800-395-1498 www.DXV.ca

In Mexico:

DXV Via Morelos 330

Col. Santa Clara Coatitla Ecatepec, Estado de México 55540

Toll Free: 01-800-8391200 www.DXV.mx

1 INSTALL HANDLE

CAUTION Turn off hot and cold water supplies before beginning.

- Use the HEX KEY (1) provided to loosen the handle SET SCREW (2) and take out the HOLDER ASSEMBLY (3) from HANDLE (4).
- Install ESCUTCHEON (5) onto HOLDER ASSEMBLY (3) as shown and apply sealant to groove on back side of ESCUTCHEON (5).
- Install HOLDER ASSEMBLY (3) with ESCUTCHEON (5) onto DIVERTER VALVE (6). Thread HOLDER ASSEMBLY (3) onto rough valve until ESCUTCHEON (5) is flush against the wall.

