BATHROOM
Sade Floor-Mounted Tub Filler
w/Wall-Mounted Handshower &
Diverter
G-1853-C14U






Information

- Floor-mounted spout installation
- Aerated Flow Rate ~10.6 gpm @45 psi
- Handshower flow rate ≤1.5 max gpm
- 9-7/8" spout reach
- 37"- 40" spout height
- Optional in-line pressure balancing valve
- Wall-mounted handle installation

G-1853 SADE Series

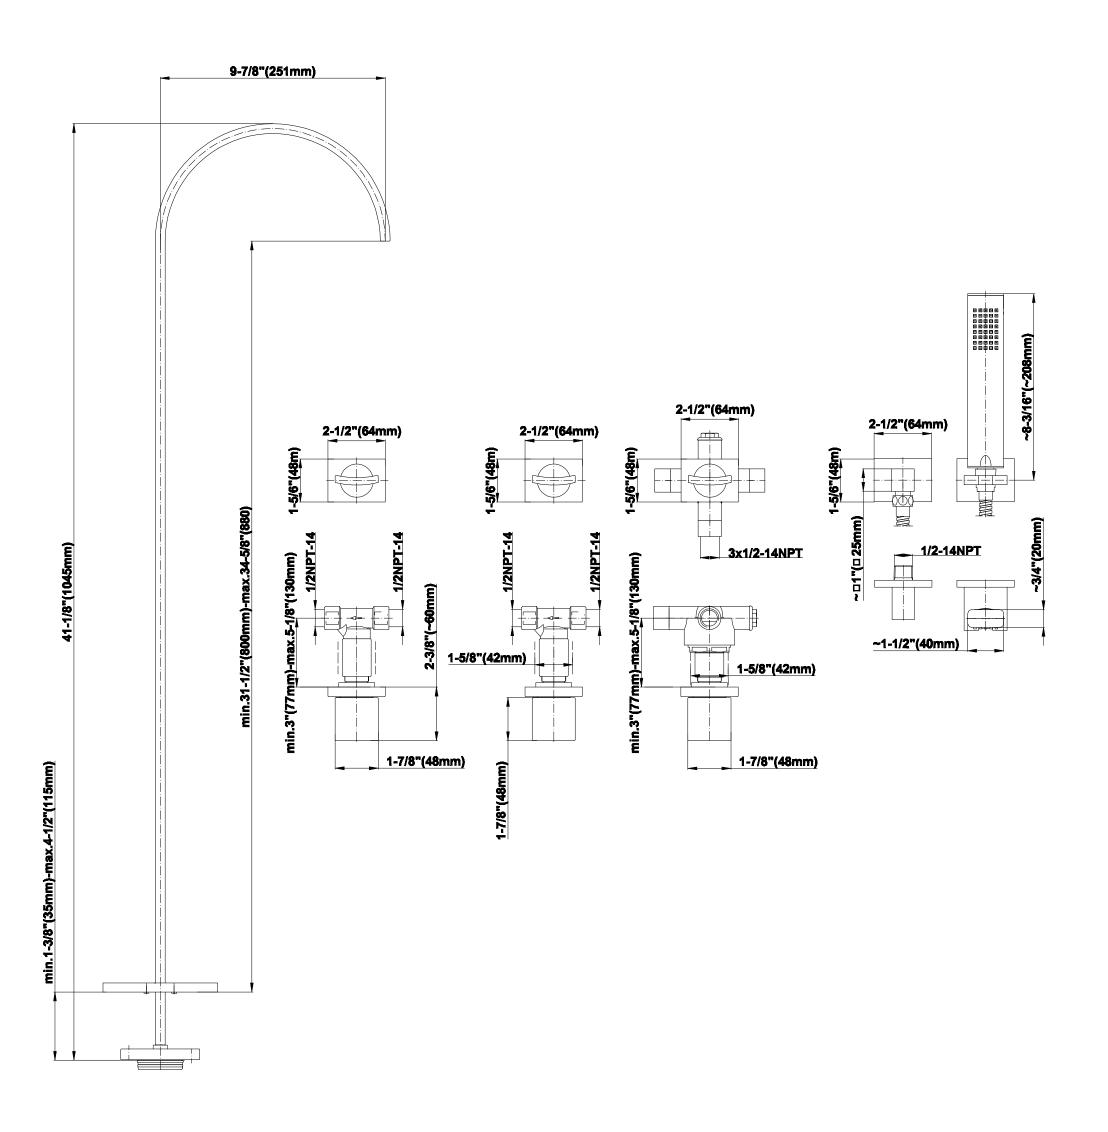





C14U-BS







24K Gold



Gold



Black™



24K Brushed Architectural Matte Black Olive Bronze





Polished Chrome




Polished Nickel




SteeInox® (Satin Nickel)



C14U-BS, VS, WS LUNA, SADE, TARGA Series

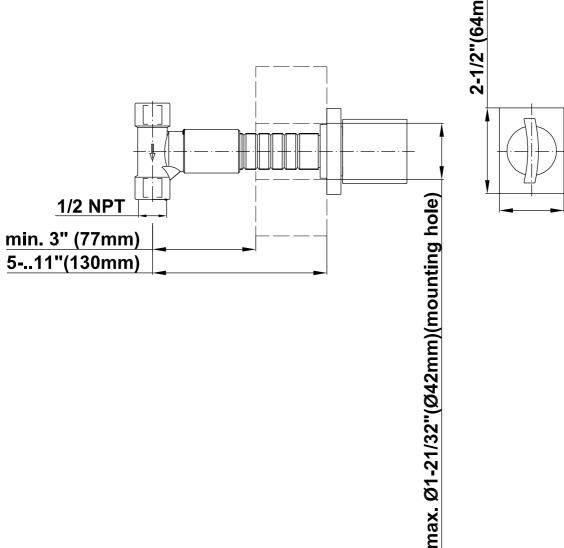











24K Gold





Gold



Black™





24K Brushed Architectural Matte Black Olive Bronze





Polished Chrome




Polished Nickel



SteeInox® (Satin Nickel)




G-1050Rough

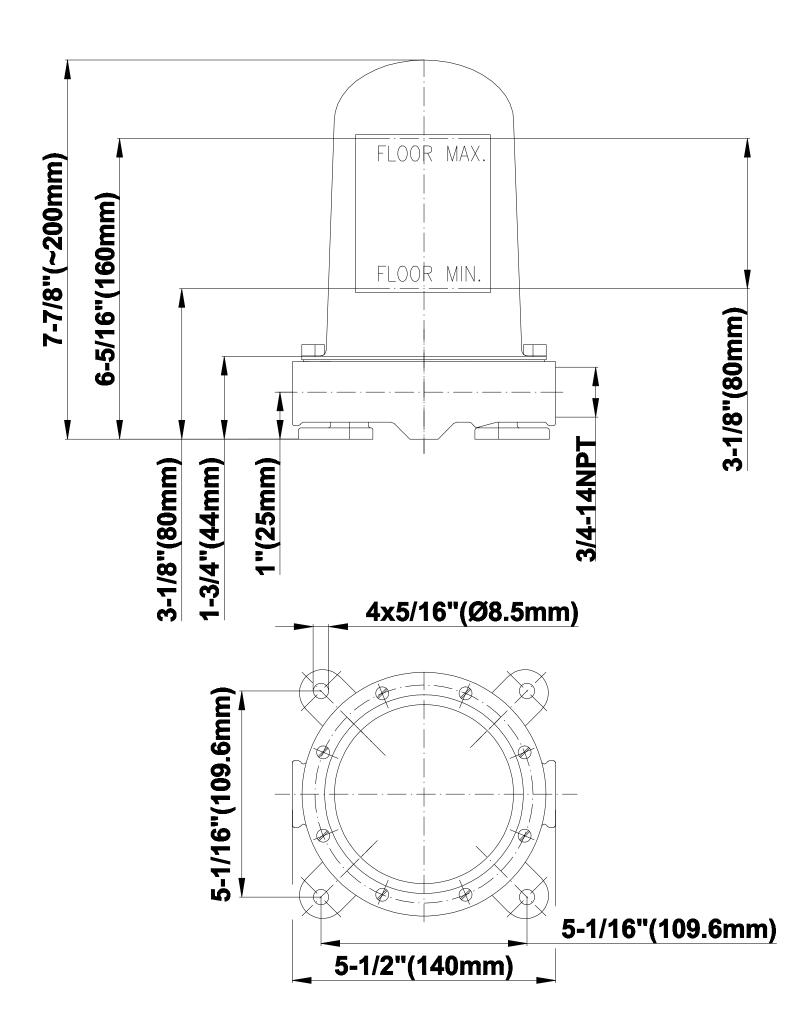





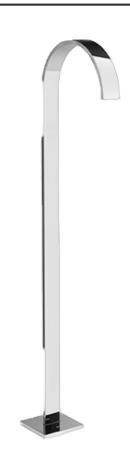

Information

- Floor-mounted spout installation
- Aerated Flow Rate ~10.6 gpm @45 psi
- 9-7/8" spout reach
- 37"- 40" ~spout height
- Optional in-line pressure balancing valve



24K Gold



Gold



Black™





24K Brushed Architectural Matte Black Olive Bronze



Polished Chrome



Nickel




SteeInox® (Satin Nickel)



Architectural White

G-1852-T SPOUT SADE Series

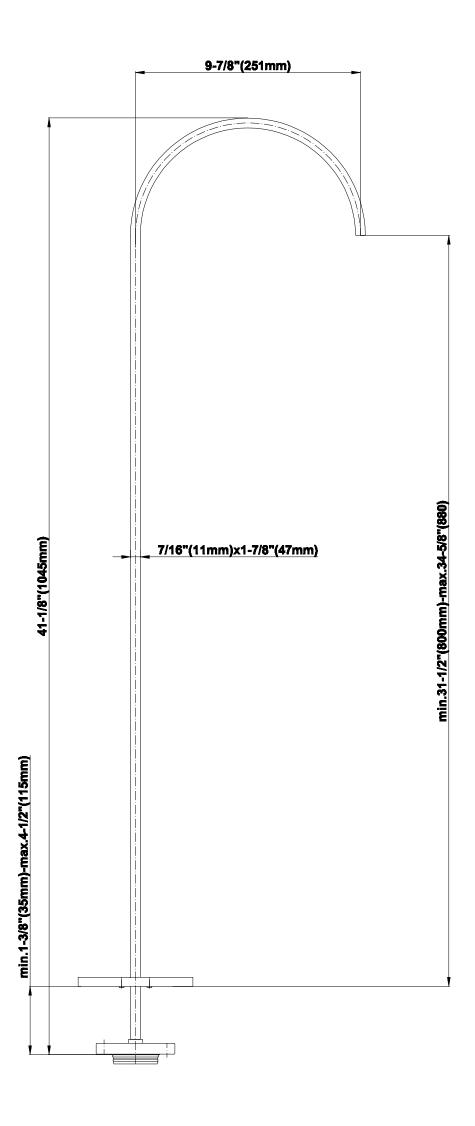





G-6056



Information

• Wall-mounted Handshower and Diverter Flow Rate 2.1 gpm @ 60 psi



24K Gold



Gold



Black™





24K Brushed Architectural Matte Black Olive Bronze



Polished Chrome



Nickel



SteeInox® (Satin Nickel)



G-6056 SADE, TARGA, LUNA Series

