SHOWER Luna Thermostatic Shower Set (Rough & Trim) GF4.000A-C14S






Information

• Thermostatic Shower Spout Flow Rate 2.1 gpm @ 60 psi



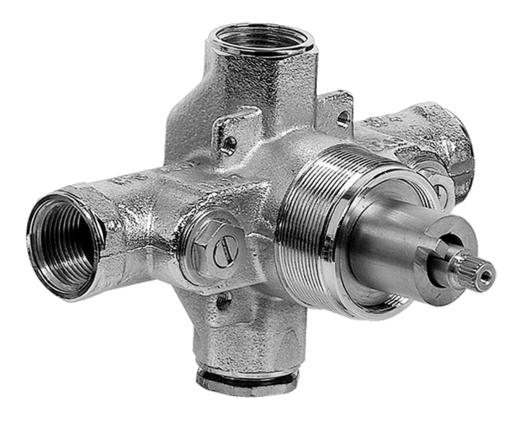

- 18.4 gpm @ 60 psi
- 3/4" universal inlets/outlets with female threads
- Built-in service stops
- Complete serviceability from front of all units
- Supplied with protective plastic cover
- Thermostatic valve uses a paraffin wax cartridge

Finishes






Polished Chrome

Steelnox® (Satin Nickel)



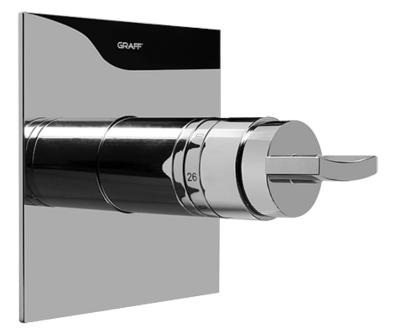

- Single metal handle
- Decorative trim plate
- Use with G-8000 or G-8005 thermostatic rough valve
- To complete package, you must order rough valve


Finishes






Polished Stee Chrome (Satin


Steelnox® (Satin Nickel)



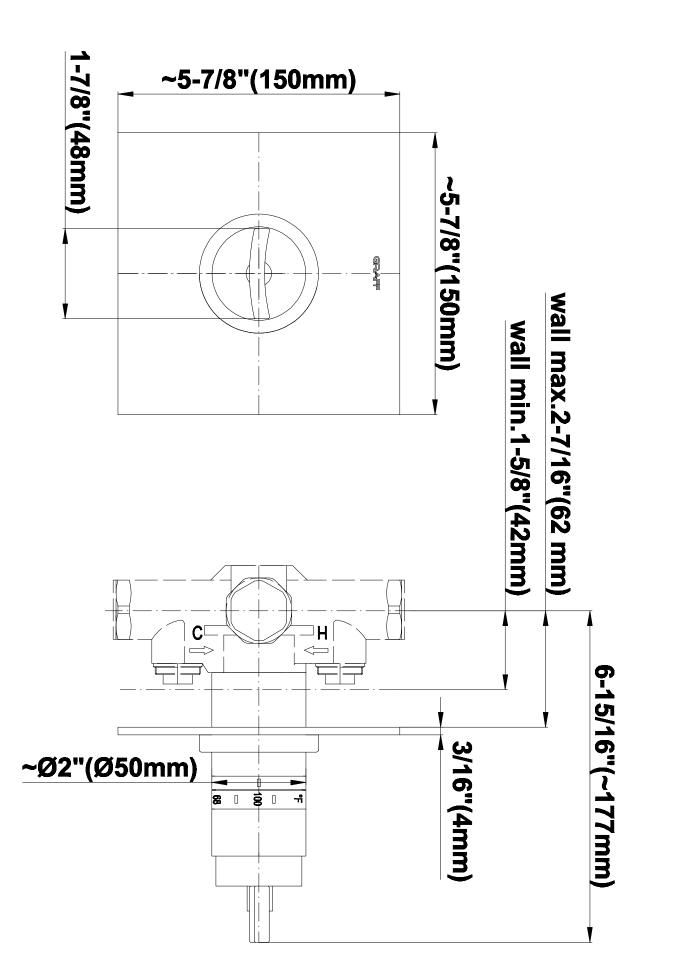





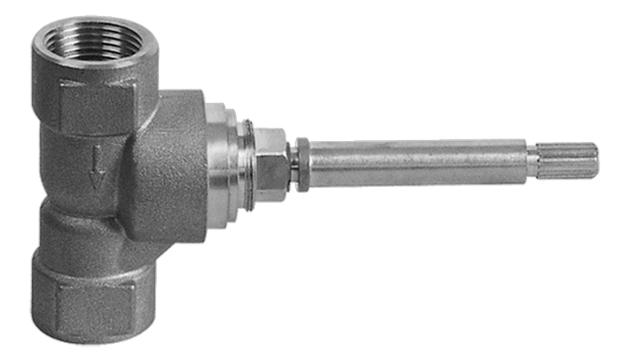

- 3/4" universal inlets/outlets with female threads
- Supplied with protective plastic cover

Finishes






Polished Chrome

Steelnox® (Satin Nickel)



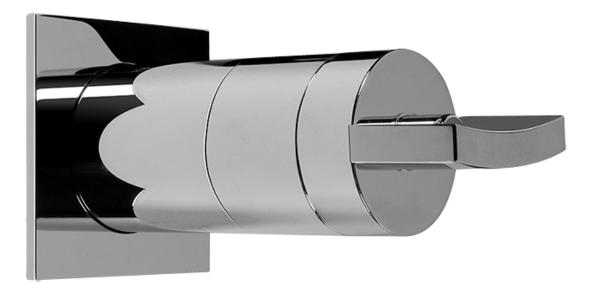

- Single metal handle
- Decorative trim plate
- Use with G-8070 or G-8075 thermostatic stop/volume control rough valve
- To complete package, you must order rough valve

Finishes






Polished Steelne Chrome (Satin N

Steelnox® (Satin Nickel)



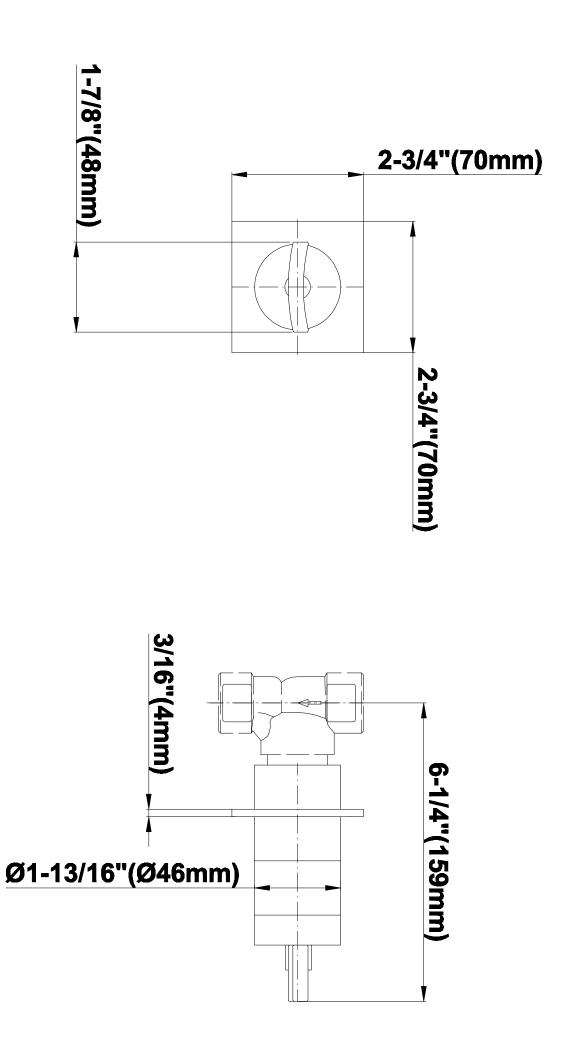

n c



SHOWER Spout and Wall Bracket G-8700-T





Finishes



Chrome




Polished Steelnox® (Satin Nickel)

G-8700 LUNA Series

3-3/8"(86mm)x5/8"(15mm)

53-3/8"(1356mm)

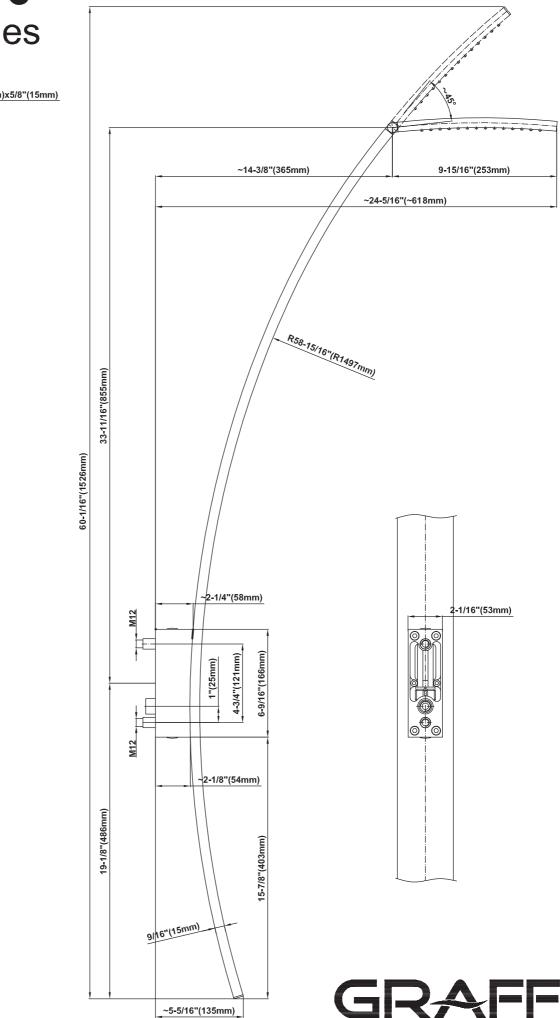

CUTTING

EDGE

DESI

®

GN

SHOWER Rough **G-8705**





Finishes




Polished

Chrome



Steelnox® (Satin Nickel)


G-8705

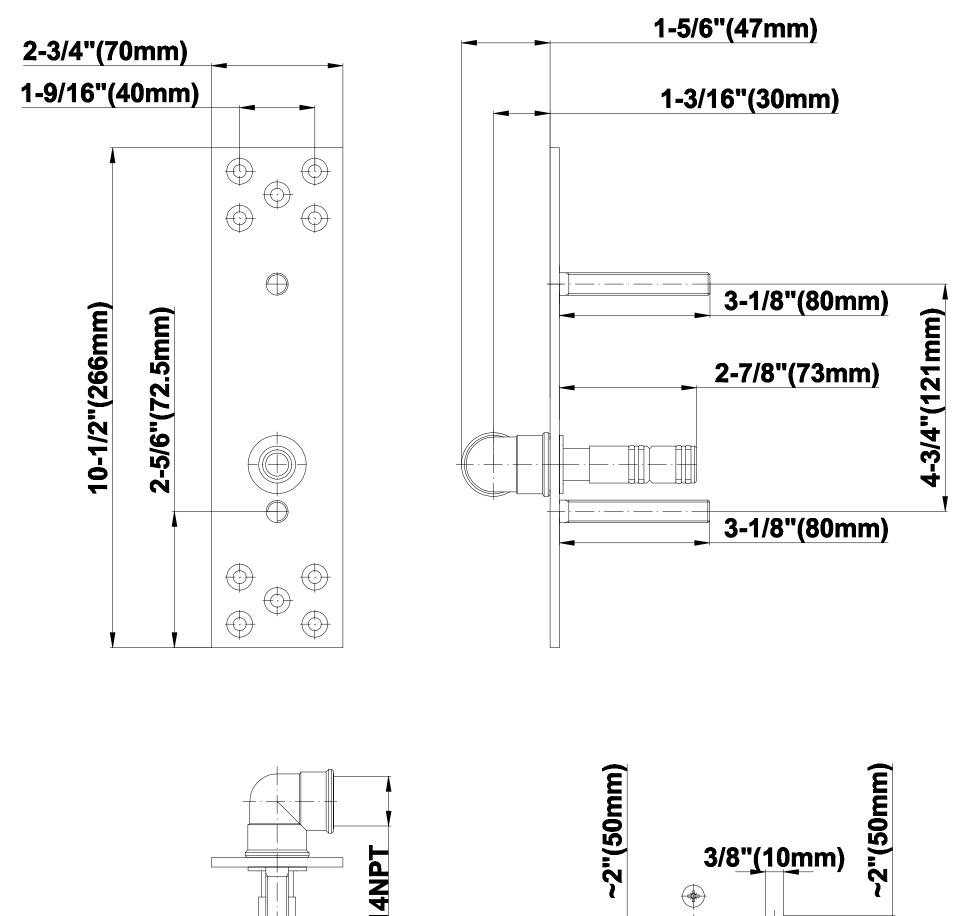



YAR

BBK



AUMINIMUM

