SHOWER Ceiling-Mount Shower System w/Diverter Valve **AQ5.000A-LM39S**










Information

- Wall-mounted, battery-powered controller and holder; controls LED chromotherapy lighting
- Rainfall, rain curtain and cascade water functions
- No-clog, easy-clean spray nozzles
- Showerhead flow rate \leq 2.5 gpm
- Includes trim plate & handle and diverter valve
- ADA



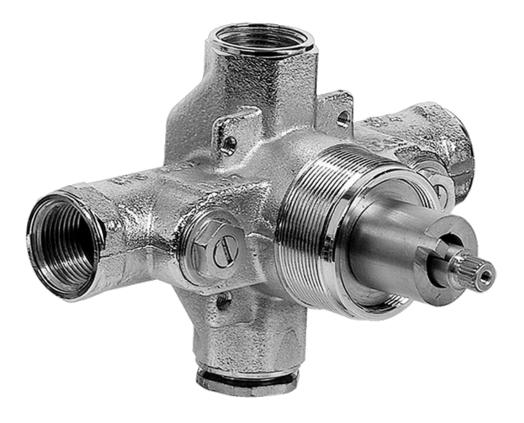


Information

- 18.4 gpm @ 60 psi
- 3/4" universal inlets/outlets with female threads
- Built-in service stops
- Complete serviceability from front of all units
- Supplied with protective plastic cover
- Thermostatic valve uses a paraffin wax cartridge





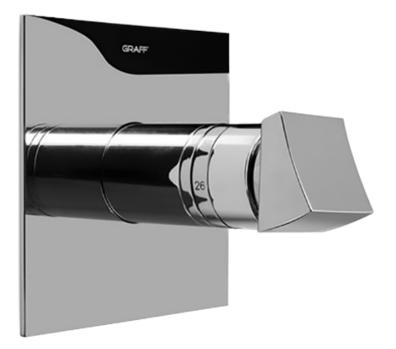


Information

- Single metal handle
- Decorative trim plate
- Use with G-8000 or G-8005 thermostatic rough valve
- To complete package, you must order rough valve
- This is a discontinued product. Please see below for similar product recommendations.





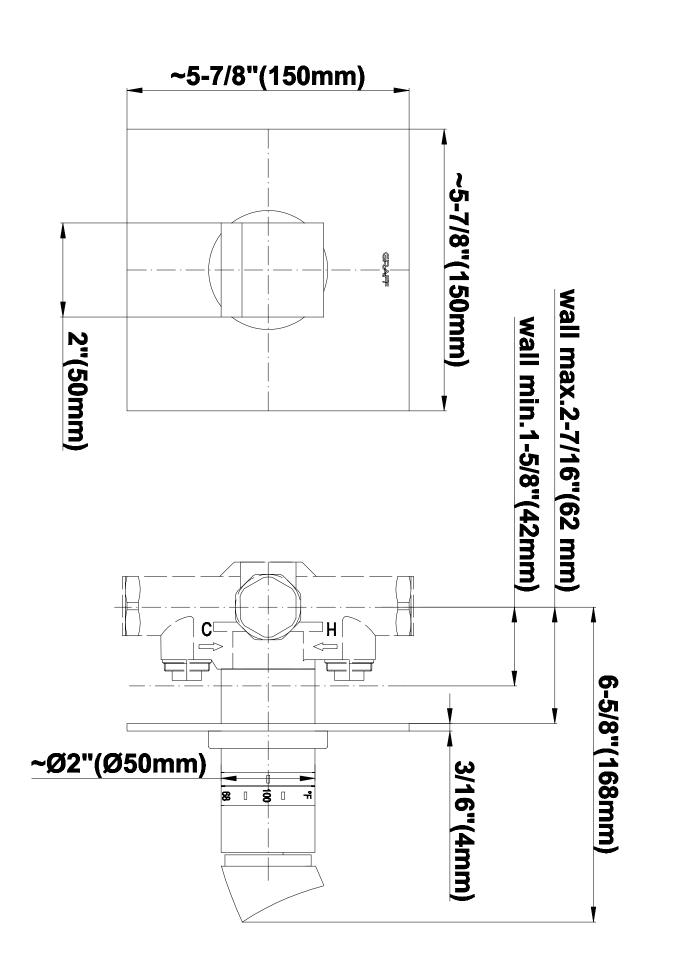

n C



SHOWER 3-Way High Flow Transfer Rough Valve WITH off function **G-8050**





Information


- Intended for use with Thermostatic Shower Systems
- 1/2" 3-way diverter valve with 3 outlets and off function
- Universal inlets/outlets with female threads
- Operates one function at a time
- Supplied with protective plastic cover
- CALGreen compliant depending on functions
- CALGreen


Finishes



Polished Chrome

G-8050

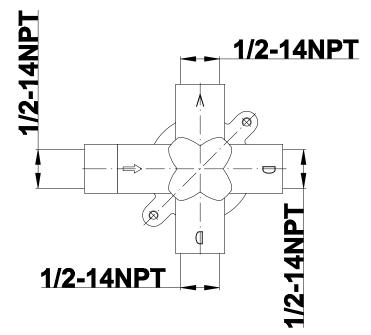

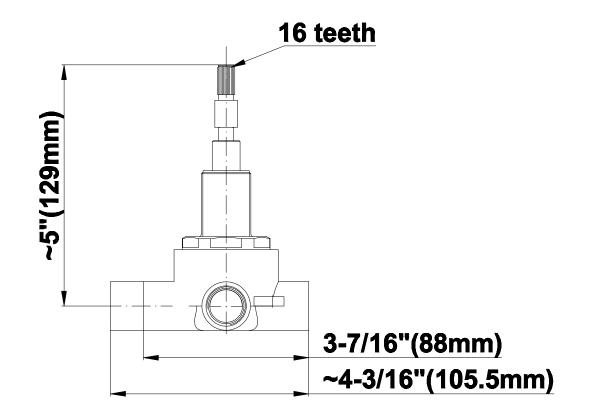








Information

- Single metal lever handle
- Decorative trim plate WITH off function
- Use with G-8050 (4-port thermostatic diverter valve w/stop)
- To complete package, you must order rough diverter valve
- This is a discontinued product. Please see below for similar product recommendations.



G - 8066

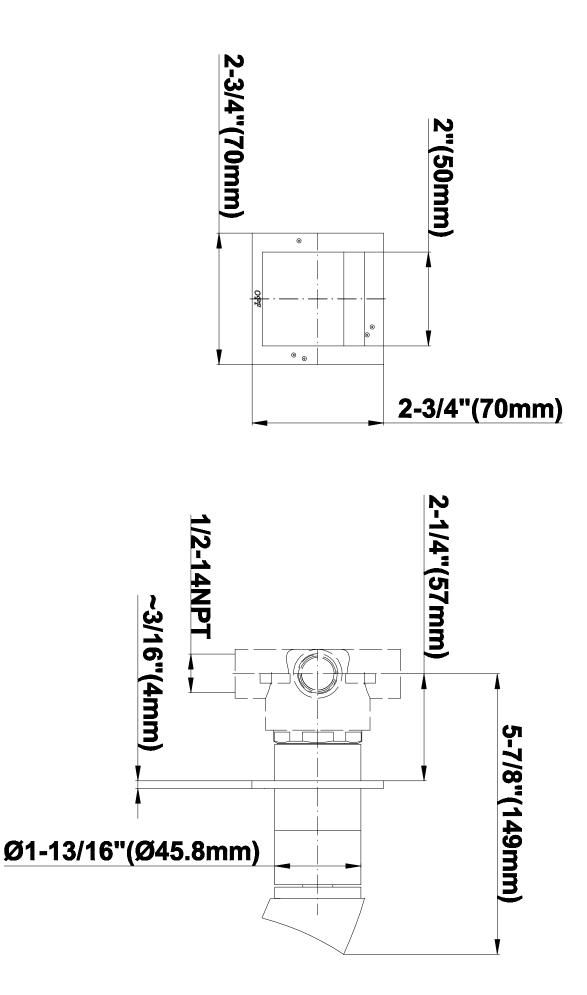


n c



SHOWER Ceiling-Mount Showerhead System **G-8221**



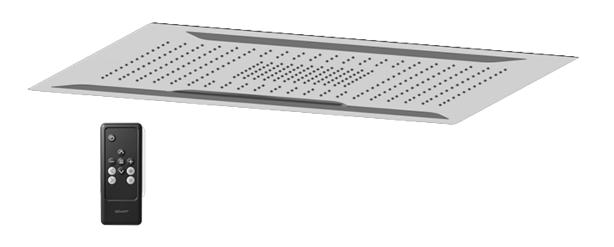

Information

- Rainfall, rain curtain and cascade water functions
- 6-color LED chromotherapy lighting
- · Battery powered LED controller with wall-mounted holder
- No-clog, easy-clean spray nozzles
- Showerhead flow rate \leq 1.8 max gpm
- CALGreen





| | | | | | | | | | ii: | | | | | | | | | | | |
|---|--------------|----|-------|----|-----|-----|------|------|-----|-----|----|-----|-----|----|---|----|----|-----|-----|--|
| ٠ | | ٠ | | .* | ٠ | 1.5 | | .* | | . * | | | ٠ | ٠ | ٠ | | ٠ | | ٠ | |
| • | | | ÷. | | | 1 | | 85 | 12 | | 12 | | 1 | | | | • | • | | |
| | 12 | | | 1 | 1 | 2 | • | | | 12 | ۰. | ۰. | | • | | | | | | 1. Sec. 1. Sec |
| 3 | 1 | | | 1 | 12 | | | | | - | | | | | | • | • | | • | • |
| | | | ٠÷. | 5 | 1 | | | 22 | 32 | 2.2 | 20 | 22 | ୁ | 21 | | | | | • | |
| • | | • | | | | | | | | | | . • | • • | | | | | • | • | |
| | | | | 1 | 1 | | 22 | | 12 | 2.2 | 23 | 12 | 2.3 | | | | ٠. | | • | |
| | ٠ ٠ . | | | 8 | 23 | | | 1.1 | 22 | 22 | 20 | 12 | 2.2 | | • | | • | | • | |
| | ۰. | • | | | | | | | 1.5 | | | | * * | | • | • | • | | | |
| • | | | S. 7. | | 65. | | ** | | | •• | | 98 | •.• | | | • | ٠ | | • | |
| 2 | 12 | 12 | | e. | | | | | | | | | | | 1 | 10 | | 85. | - 5 | 0.000 |
| 2 | - 21 | | | 2 | φ. | 22 | - 21 | - 21 | 2 | 82 | ÷. | 2 | 2 | 12 | | 12 | ÷. | | 12 | |
| ٠ | ٠ | • | ٠ | • | | | • | | • | • | • | * | • | • | • | • | • | ٠ | • | • |
| | | | | | 4 | - | - | | - | | - | | - | - | | | | | | |

Product Features

- Rainfall, rain curtain and cascade water functions
- 6-color LED chromotherapy lighting
- Battery powered LED controller
 with wall-mounted holder
- No-clog, easy-clean spray nozzles
- Showerhead flow rate ≤ 1.8 max gpm

Available Finishes

• Stainless Polished G-8221-SP

Code Compliance

CALGreen

Warranty

Limited lifetime warranty

For complete warranty information go to https://www.graff-faucets.com/en/info/faqs

17-11/16" (450 mm)

23-5/8" (600 mm)

The measurements shown are for reference only. Products and specifications shown are subject to change without notice. Revised 1/2018 www.graff-designs.com | phone: 800-954-4723