Full Thermostatic Shower System with Transfer Valve (Rough & Trim)



GA5.222B-LC1S



Information

- 3/4" Thermostatic Valve
- 1/2" 4-Port Diverter Valve with 3 outlets and off function
- 8" Showerhead with 11" Wall-Mount Arm & Flange
- Swivel Body Sprays (3 pieces)
- Handshower Set w/Wall Bracket
- Showerhead Features No-Clog, Easy-Clean Spray Nozzles
- Flow Rates: showerhead ≤2.0 max gpm, handshower ≤1.5 max gpm





- 18.4 gpm @ 60 psi
- 3/4" universal inlets/outlets with female threads
- Built-in service stops
- Complete serviceability from front of all units
- Supplied with protective plastic cover
- Thermostatic valve uses a paraffin wax cartridge



Olive Bronze



Polished Chrome



Polished Nickel



Steelnox® (Satin Nickel)





- Single metal handle
- Decorative trim plate
- Use with G-8000 or G-8005 thermostatic rough valve
- To complete package, you must order rough valve
- ADA



Olive Bronze




Polished Chrome




Polished Nickel



Steelnox® (Satin Nickel)

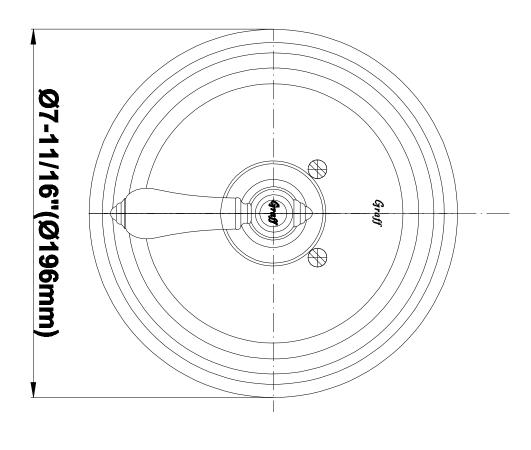

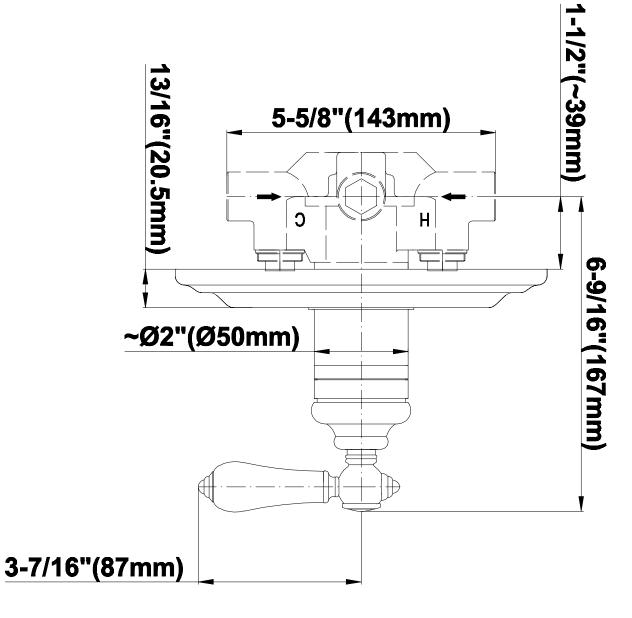







Information

- Intended for use with Thermostatic Shower Systems
- 1/2" 3-way diverter valve with 3 outlets and off function
- Universal inlets/outlets with female threads
- Operates one function at a time
- Supplied with protective plastic cover
- CALGreen compliant depending on functions
- CALGreen








Polished Chrome




Polished Nickel




Steelnox® (Satin Nickel)

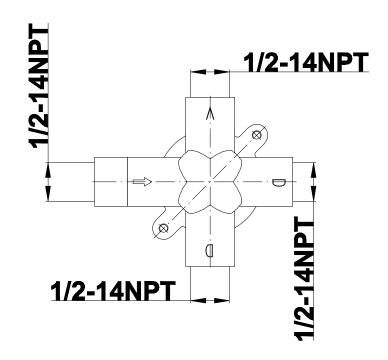

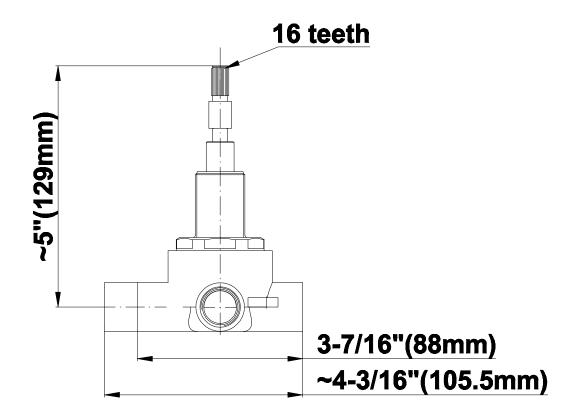









- Single metal lever handle
- Decorative trim plate WITH off function
- Use with G-8050 (4-port thermostatic diverter valve)
- To complete package, you must order rough diverter valve
- ADA



Olive Bronze




Polished Chrome



Polished Nickel



Steelnox® (Satin Nickel)

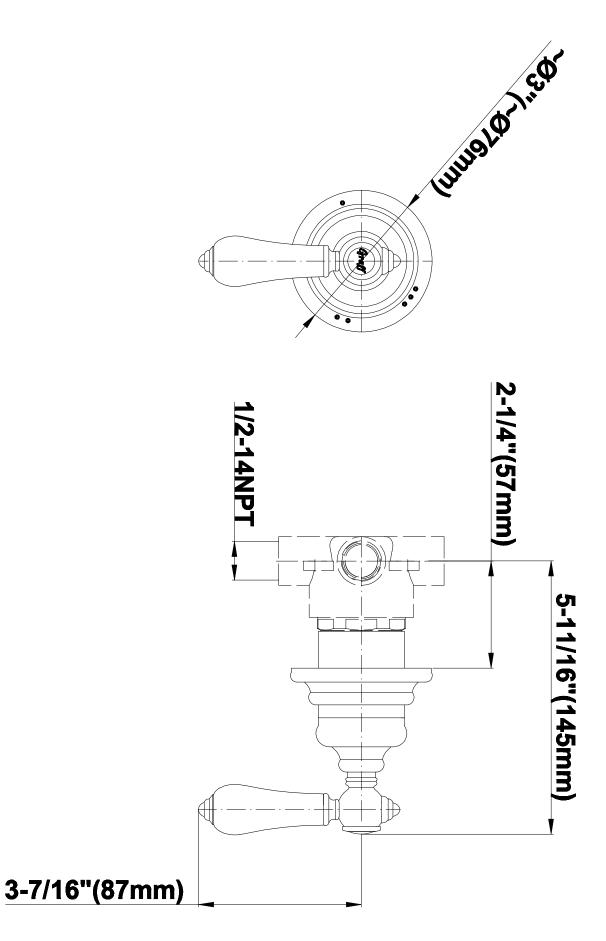







Information

- Sunflower shape
- 112 no-clog, easy-clean rubber spray nozzles
- Metal ball-joint allows for showerhead angle adjustment
- Showerhead flow rate ≤ 1.8 max gpm
- Recommend use with ceiling shower arm
- Recommended for use at no more than 10 degrees tilt
- CALGreen



Olive Bronze




Polished Chrome



Polished Nickel



Steelnox® (Satin Nickel)

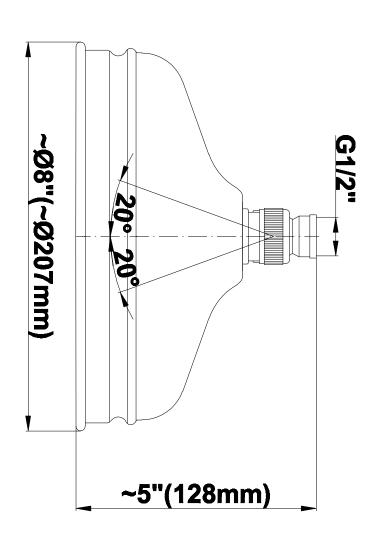





Information

- 12 no-clog, easy-clean silicon jets
- Metal ball-joint allows for angle adjustment of body spray
- Brass wall escutcheon
- Body spray flow rate ≤ 1.5 max gpm



Olive Bronze




Polished Chrome



Polished Nickel



Steelnox® (Satin Nickel)

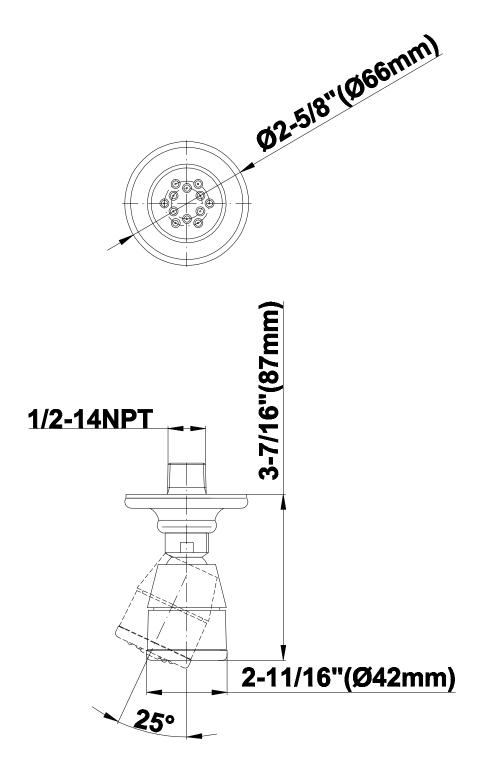







- Includes arm and flange
- 1/2" NPT male thread inlet
- For use with all showerheads



Olive Bronze




Polished Chrome



Polished Nickel



Steelnox® (Satin Nickel)

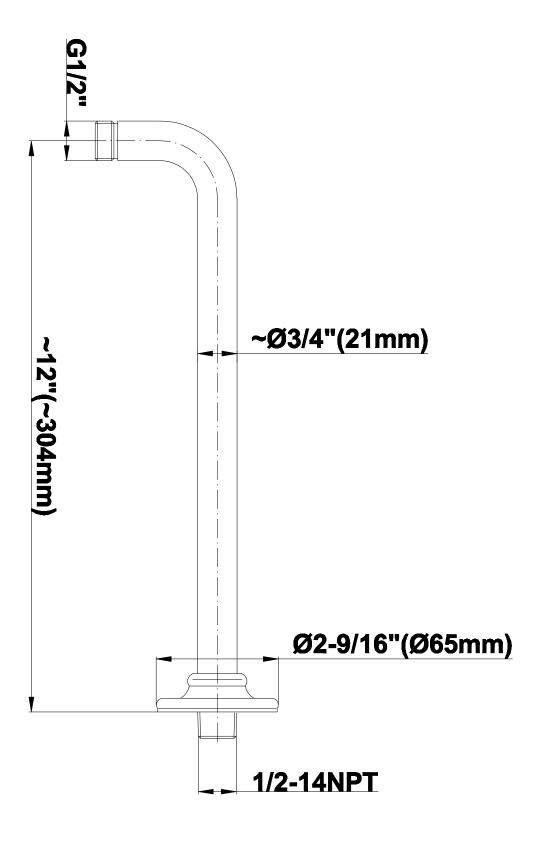





Information

- Solid brass construction
- Swivel holder



Olive Bronze




Polished Chrome



Polished Nickel



Steelnox® (Satin Nickel)

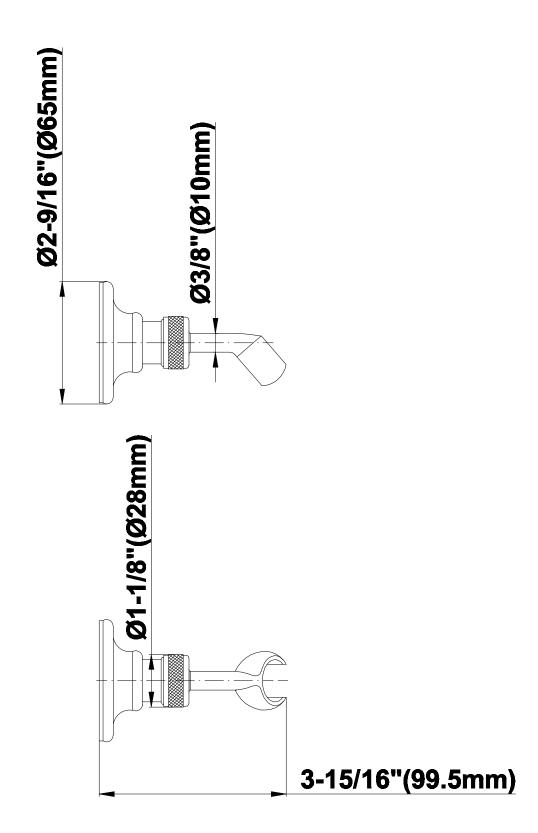







• 1/2" NPT female thread inlet



Olive Bronze




Polished Chrome



Polished Nickel



Steelnox® (Satin Nickel)

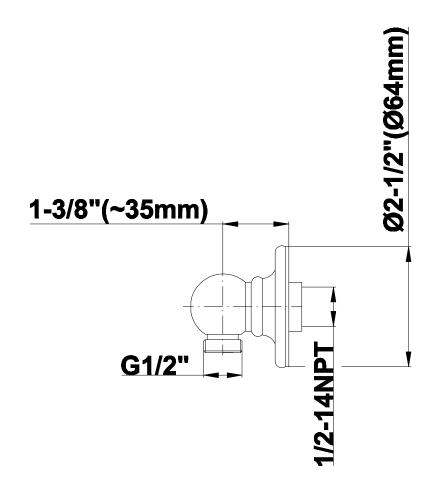







- Solid brass construction
- Smooth, all-metal handle
- Shower hose not included
- Handshower flow rate ≤1.5 max gpm
- CALGreen



Olive Bronze



Polished Chrome




Polished Nickel



Steelnox® (Satin Nickel)

Traditional Handshower G-8604

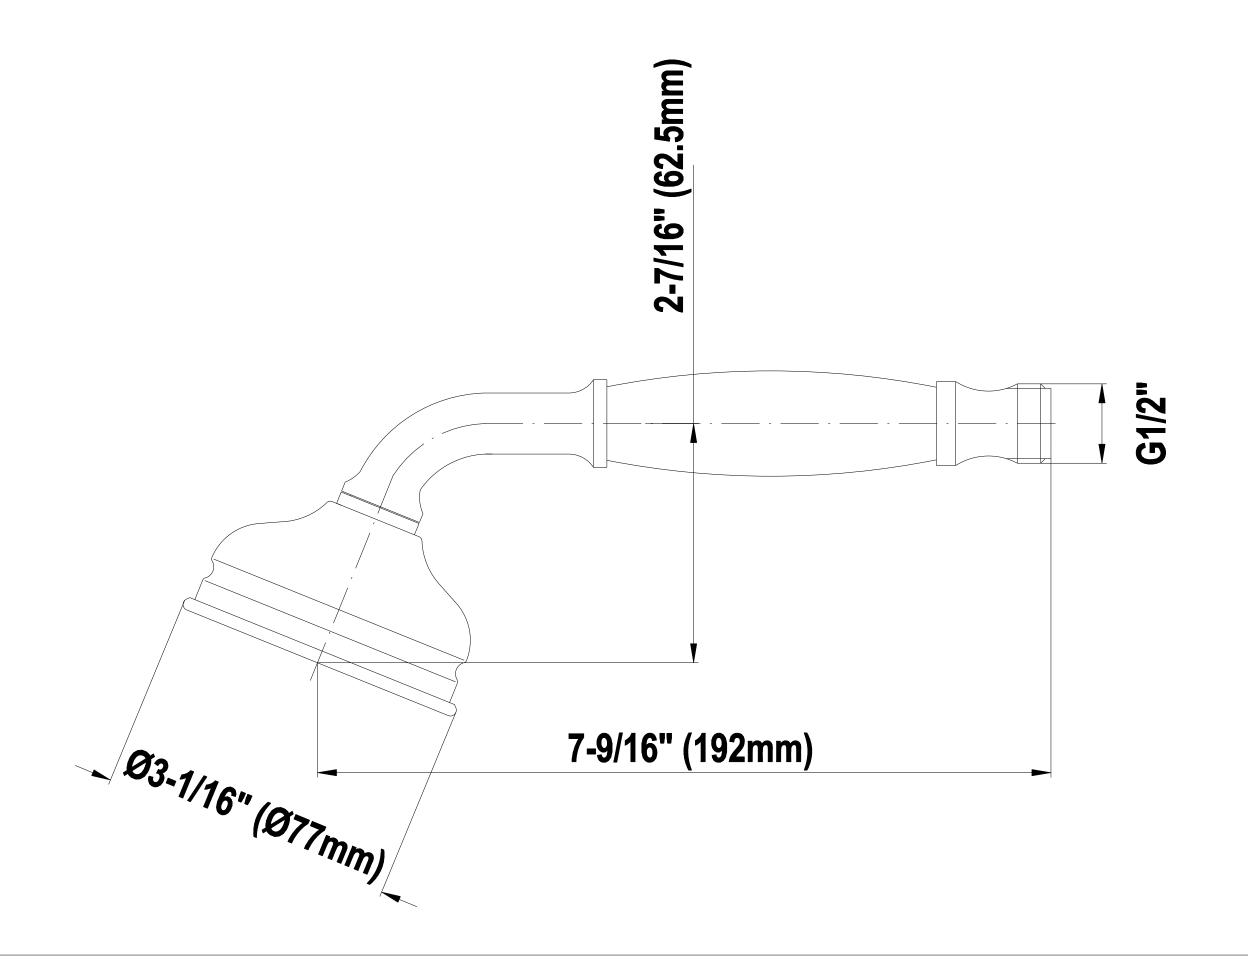



Information

• Brass spiral flexible hose with conical nut



Olive Bronze



Polished Chrome



Polished Nickel



Steelnox® (Satin Nickel)

Shower Components 59" Shower Hose






Product Features

Brass spiral fexible hose with conical nut

Warranty

Limited lifetime warranty

For complete warranty information go to www.graff-designs.com/en-nam/warranty

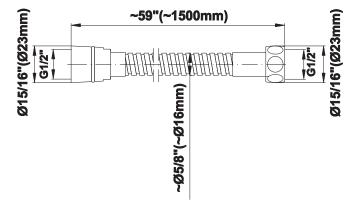

Available Finishes

- Polished Chrome G-8605-PC
- Polished Nickel G-8605-PN
- **Brushed Nickel** G-8605-BNi
- **Unfinished Brushed Brass*** G-8605-UBB*
- **Unfinished Brass*** G-8605-UB*
- Matte Black* G-8605-MBK*
- Architectural Black* G-8605-BK*
- Architectural White* G-8605-WT*
- Olive Brass* G-8605-OB*
- Gunmetal* G-8605-GM*
- Vintage Brushed Brass* G-8605-VBB*
- Steelnox (Satin Nickel) G-8605-SN
- 24K Brushed Gold* G-8605-BAU*
- 24K Gold* G-8605-AU*
- Gunmetal Distressed* G-8605-GMD*

^{*} Special order finish- call for availability