

HCC Holdings, Inc.

4700 West 160th
Cleveland, Ohio 44135

Phone: 800-321-9532
Website: www.Oatey.com




SCOUT™ Steam Boiler Cleaner

Date: August 2017

A non-toxic boiler cleaner that stops priming and surging in minutes and helps to eliminate pipe hammering-gets boiler water crystal clear. Removes rust, scale, oil, foam and impurities without draining or flushing system. **Scout** filters down through the boiler water, removing impurities as it sinks to the bottom. This soft sediment remains on the bottom, insuring easy and complete draw-off, leaving boiler and water completely clean. Eliminates time-consuming boiler shutdowns because it works while the boiler is operating normally. Inhibits corrosion by purging highly corrosive nascent oxygen. Saves fuel.

Cleans pressure vessels, steam kettles, heat exchangers, steam generators and tanks. Can be used wherever water in a vessel is heated or agitated and where the sediment can be removed or drained off. Contains no petroleum distillates and is safe to use in hydronic systems with plastic or rubber components.

Scout ensures trouble-free start-ups on new installations, and helps to attain peak efficiency on existing ones. When used on a regular basis provides clean, dry steam along with improved boiler efficiency and heat transfer. Safe to use on food service, process equipment and other sensitive, critical applications.

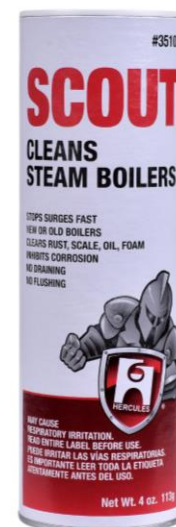

APPROVALS & LISTINGS

Not applicable.

SPECIFIC USES

Use **Scout** to clean all steam and hydronic systems including those with plastic and rubber components.

SPECIFIC APPLICATIONS*

Can be used to clean and remove rust, scale, oil, foam, and other foreign matter without completely draining or flushing system. Stops priming and surging of system.

*For special applications which may not be covered on this or other Oatey literature, please contact Oatey Technical Services Department by phone 1-800-321-9532, or fax 1-800-321-9535, or visit our technical database web-site at www.Oatey.com.

SIZE & PACKING

| STOCK NUMBER | SIZE | PACKING | WEIGHT/CASE |
|--------------|----------|---------|-------------|
| 35100 | 113 gram | 12 | 5.0 lbs. |

DIRECTIONS FOR USE

Steam Boilers: Shut down burners, relieve all pressure, remove safety valve, pour into opening, and replace valve, fire boiler. DO NOT DRAIN.

Hot Water System Boilers: require that all zone valving be closed to isolate the boiler. Next, sufficient water must be drained off to allow space to add the product. Reopen zone valving before firing up system. Allow 3 (three) days of normal operation then draw off sediment through drain cock.

Note: Do not mix **Scout** - pour contents directly from can into boiler.

| Recommended Amounts of Scout to Use | | | | | |
|--------------------------------------|---------------------------|--|--|---------------------------------|--|
| Boiler Rating Sq. Ft. of Steam | Approx. BTU Equivalent | Cans of Scout Required (113 gms each) | House Size (if boiler rating is unknown) | Typical Sq. Ft. of Radiation | Cans of Scout Required (113 gms each) |
| 350 | 85,000 | 1 | 2 apartments | 500 | 1 |
| 1,500 | 360,000 | 2 | 4 apartments | 800 | 1 |
| 3,000 | 720,000 | 4 | 8 apartments | 1,200 | 2 |
| 7,000 | 1,680,000 | 8 | 16 apartments | 2,200 | 3 |
| 15,000 | 3,600,000 | 12 | 30 apartments | 4,000 | 5 |
| 20,000 | 4,800,000 | 16 (4 lbs.) | 70 apartments | 10,000 | (2 lbs.) |
| 50,000 | 12,000,000 | 40 (10 lbs.) | 120 apartments | 17,000 | 14 (3 lbs.) |

Use full contents of one can for each 850 sq. ft. of boiler rating. For boilers over 8500 sq. ft., use one can for 1,250 sq. ft.

Conversions: 1 sq. ft. of steam = approx. 240 BTU
 1 boiler H.P. = approx. 34,000 BTU = approx. 140 sq. ft.
 1 can of scout = 113 grams = approx. 4 ounces.

When cleaning very large boilers, or using bulk sizes of **Scout**, one can = 113 grams = 4 ounces. Thus if boiler requires 20 cans, the equivalent would be 5 lbs. of **Scout**.

PHYSICAL PROPERTIES

Specific Gravity: 0.34 to 0.36
 Solubility in water: Slightly soluble in water
 Appearance/color/odor: Off white, fine light powder

WARNINGS OR CAUTIONS

- Read all cautions and directions carefully before using this product.
- Contains BARIUM SULFATE and NATURAL DIATOMACEOUS EARTH.
- Avoid prolonged inhalation of dust. May lead to pulmonary problems.

MATERIAL SAFETY INFORMATION

FOR MORE INFORMATION ON THIS PRODUCT, REQUEST SAFETY DATA SHEET (SDS) #7034E

| | |
|---------------------|---|
| For Delivery By Fax | Call 1-800-321-9535 |
| Internet | See SDS section of www.Oatey.com |

HMIS® ratings Health: 0
 Flammability: 0
 Physical hazard: 0