


INSTALLATION INSTRUCTIONS

3006, 3009

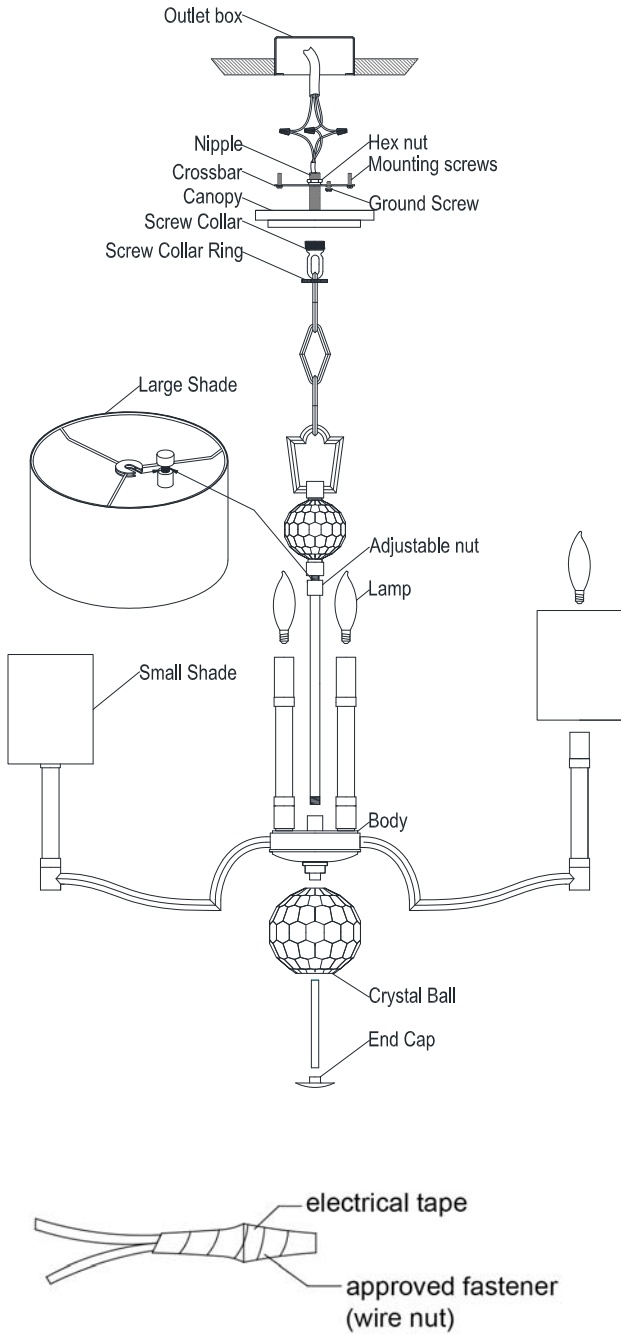

GENERAL

1. To ensure successful installation, the following instructions and diagram(s) should be read and understood.
2. All electrical connections must be made in accordance with the National Electric code, local codes, and ordinances. If you are uncertain how to install electrical wiring and lighting fixture, secure the service of a qualified licensed electrician.

TOOLS NEEDED

Blade screwdriver, Phillips screwdriver, slip joint pliers or small adjustable wrench, wire cutter/strippers, electrical current tester, stepladder, and electrical tape.

INSTALLATION PREPARATION

1. **TURN OFF THE ENTIRE ELECTRICAL CIRCUIT TO WHICH THE LIGHTING FIXTURE IS TO BE ATTACHED.** Turn the circuit breaker to the "OFF" Position or complete remove the fuse controlling the circuit. All electrical connections must be made in accordance with the National Electric code, local codes, and ordinances. If you are uncertain how to install electrical wiring and lighting fixture, secure the service of a qualified licensed electrician.
2. If an existing fixture is being replaced, remove it and note to which of the wires in the outlet box the fixture was attached to. **DO NOT SEPARATE MULTIPLE TWISTED WIRES THAT MAY BE IN THE BOX. DO NOT DAMAGE THE INSULATION OF OLDER WIRING.**
3. This fixture is designed to be mounted on a round or octagon box. The box must be securely mounted to the structure of the building.

FIXTURE INSTALLATION

1. Remove the fixture and parts bag(s) from the carton. Before discarding the carton, double check the packaging to make sure that all parts have been found.
2. Remove the screw collar ring from the screw collar loop, attach the nipple, and screw collar to the crossbar.
3. Pull existing wires out of the outlet box, and install the cross bar to the outlet box.
4. Slide the large shade over the screw collar, screw collar ring, and attached using the adjustable nut.
5. Feed the wire through the chain, screw collar ring, screw collar, canopy, and nipple.
6. Hang the fixture up using the chain to get you desired height and remove excess chain.
7. Measure 6" of lead wire beyond the end of the chain, and cut off the excess wire.
8. Fasten the bare ground wire to the ground wire from the existing outlet box (usually green or copper color) or connect the ground wire to the green screw on the mounting plate.
9. Connect the neutral (white) fixture wire coming from the fixture to the neutral (usually white) outlet wire. Fasten both wires together with a plastic wire nut and tightly wrap the wire nut with electrical tape.
10. Repeat the previous step with the hot (black wires). Make sure there are no exposed wires or strands that could cause a dangerous short circuit. **FAILURE TO CONNECT THE APPROPRIATE WIRES CORRECTLY COULD RESULT IN SERIOUS INJURY OR DEATH!**
11. Carefully place the wires back into the outlet box.
12. Lift the canopy up over the outlet box, screw on the screw collar ring to the screw collar.
13. Assemble the crystal ball to the fixture using the end cap.
14. Place the small shades on the sockets
15. Install the lamps. This fixture is rated for 40 watt type C. **DO NOT EXCEED THE RECOMMENDED WATTAGE!**
16. Restore power to the circuit at the breaker or fuse box.

Thank you for purchasing our lighting fixture.

Please clean with a soft, dry cloth ONLY! Do not use cleansers.

www.hudsonvalleylighting.com