SPECIFICATION:

FOR 2" NO-HUB AUX. INLET, EITHER

CUT IN FIELD OR

SPECIFY (-50) THREADED (-54)


JOSAM 14424 SERIES COATED CAST IRON SINGLE VERTICAL 4" NO-HUB RIGHT-HAND OFFSET FITTING WITH 2" NO-HUB VENT, ADJUSTABLE CARRIER BODY, INVERTIBLE FOR SIPHON JET OR BLOWOUT CLOSETS, WITH ABS EXTENSION WITH INTEGRAL TEST CAP, PYLON FEET, PLATED HARDWARE AND NEOPRENE FIXTURE GASKET.

CLOSET CARRIER

SINGLE, RIGHT HAND OFFSET AND 2" VENT


SERIES

14424

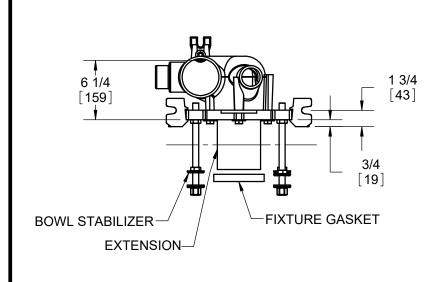

7 5/8 [194]

[229]



- ackslash FOR DIMENSION SHORTER THAN 5-1/2" (1" MIN) CUT EXTENSION FOR LONGER EXTENSION (10-1/2" MAX) SPECIFY (-10).
- ☑ RECOMMEND FEET BE SECURED TO FLOOR WITH 1/2" BOLTS AND ANCHORS (BY OTHERS).
- igotimes for SIPHON JET ROUGHING **OVER 6" OR BLOWOUT ROUGHING OVER 12-1/2"** SPECIFY ON ORDER.

SIPHON JET DIMS SHOWN. FOR BLOWOUT DIMS, USE:

7 1/2 MIN 11" & MAX 16 1/2" [191] 13 3/4 [349] 4 MIN 🚫 ANCHOR FOOT ⊠ 9 MAX / 7 [356] **ADJUSTABLE** FOOT ⊠ MAX [102] [75] [127]

2 1/4 [57]

5 1/2

[140]

	-SD	SPECIAL DUTY 500 LB CARRIER			
	-SDH	SPECIAL DUTY HIGH 750 LB CAPACITY		-XSD	EXTRA SPECIAL DUTY 1000 LB CAP
	-VP	VANDAL-PROOF TRIM		-30	CAST IRON ADJ EXT W/ CONNECTOR
	-1	POSITIONING FRAME		20.0	CAST IDON AD LEVY MUCONN 8 TEST CAD
	-6	SUPPLY PIPE SUPPORT (SPECIFY TYPE OF PIPE)		-30-2	CAST IRON ADJ. EXT. W/ CONN & TEST CAP
	-10	ABS EXTENSION THROUGH 10-1/2" WALL		-50	NO-HUB HIGH AUX. INLET, OPPOSITE VENT
	-10	ABO EXTENSION THROUGH 10-1/2 WALL			
1	-24	CARRIER FOR FLOOR MOUNTED BACK OUTLET CHINA BOWLS		-54	THREADED HIGH AUX. INLET, OPPOSITE VENT

DATE OF LAST CHANGE: 08/10/21

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCES AND CHANGE WITHOUT NOTICE.
WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA.

MICHIGAN CITY, INDIANA

NOTES