

FEATURES


- Solid brass construction for durability and reliability
- Allows bather to set precise temperature
- Patented K-joint installation ensures consistent trim appearance regardless of variability in valve rough-in
- Complements the Bellis collection

CODES/STANDARDS APPLICABLE

- Specified model meets or exceeds the following:
- ADA
 - ASME A112.18.1/CSA B125.1

P24622

ADA

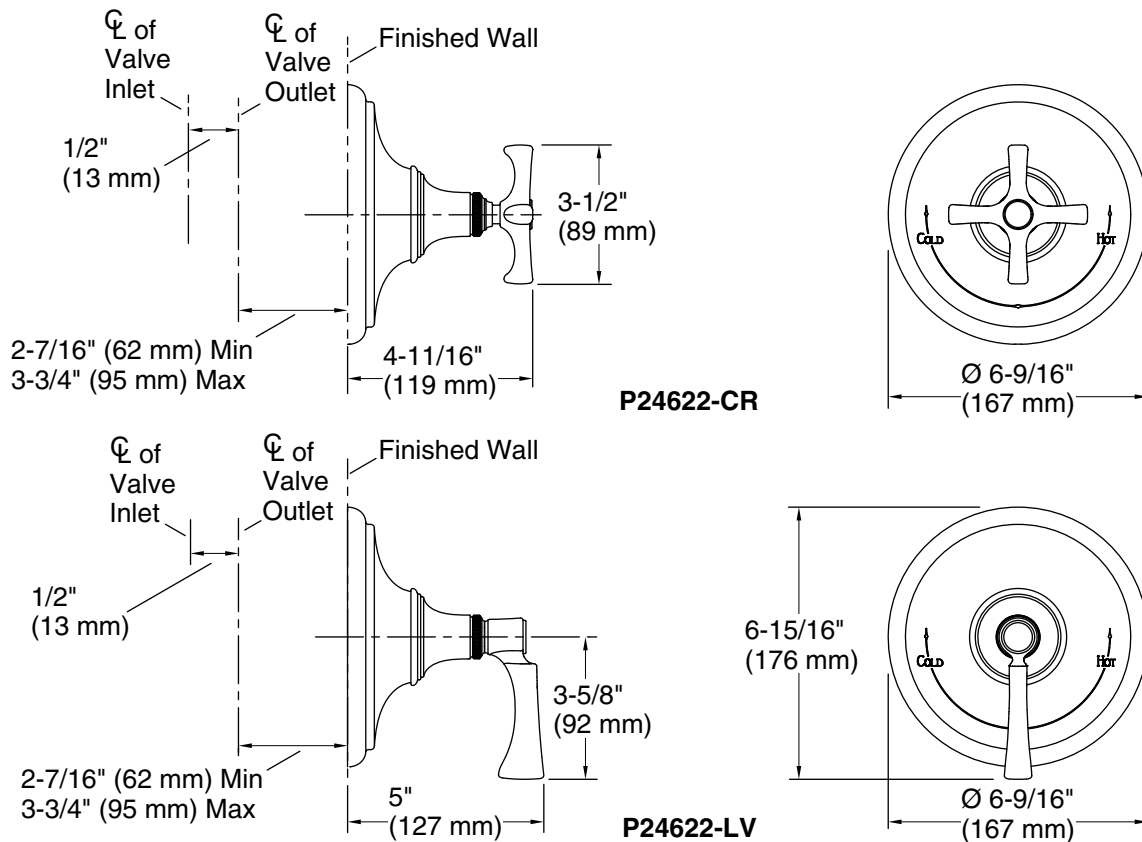

SPECIFIED MODEL				
Model	Description	Finishes		
P24622-CR	Bellis Thermostatic Valve Trim, Cross Handle	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> AG Brushed Nickel <input type="checkbox"/> ULB Unlacquered Brass
P24622-LV	Bellis Thermostatic Valve Trim, Lever Handle	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> AG Brushed Nickel <input type="checkbox"/> ULB Unlacquered Brass
Required Rough-in				
P29511-WS	1/2" Thermostatic Mixing Valve	<input type="checkbox"/> NA		
P29512-WS	3/4" Thermostatic Mixing Valve	<input type="checkbox"/> NA		

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.