

Location: \_\_\_\_\_




# MI-LINT

# LINT INTERCEPTOR

**Specification:** MIFAB® Series MI-LINT sanitary powder epoxy coated inside and outside fabricated 10 gauge steel lint interceptor with flow rate of \_\_\_\_\_ (indicate). Unit shall include: (1/2" (13) thick removable primary straining baffle with 3/8" (9) holes and secondary 1/2" (13) thick removable straining baffle with 3/8" (9) holes, removable cross bar, securing bolt(s), stainless steel calibrated orifice plate, and steel powder epoxy coated non skid rectangular gasketed lid(s).

**Function:** Used in commercial laundry facilities to receive wastewater with lint and sediment through the side inlet. The primary straining and removable secondary straining baffle are designed to capture debris and prevent drain line clogging. Electrostatically applied powder epoxy coating ensures extra long life.

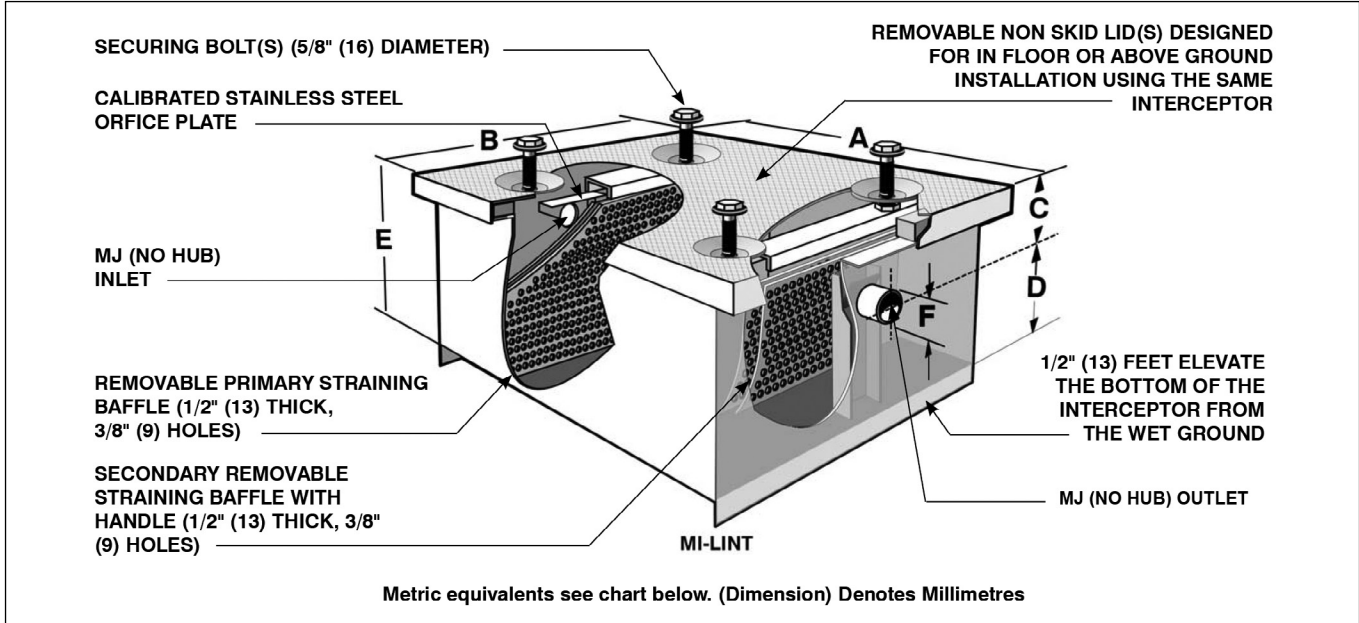

MODEL NO.	SIZE NO. OF MACHINES	US GPM	A	B	C	D	E	F	NO. OF LIDS	NO. OF BOLTS	LIQUID HOLDING CAPACITY
MI-LINT-1	5	50	29.5" (736)	20" (500)	3" (75)	17" (425)	20" (500)	2" (50)	1	4	34.29
MI-LINT-2	7	70	29.5" (737)	20.5" (513)	4" (100)	20" (500)	24" (600)	3" (75)	1	4	40.74
MI-LINT-3	10	100	33.5" (838)	26" (650)	4" (100)	26" (650)	30" (750)	3" (75)	2	4	80.18
MI-LINT-4	13	130	37.5" (938)	30" (750)	4" (100)	28" (700)	32" (800)	4" (100)	2	8	114.03
MI-LINT-5	15	150	55.5" (1388)	26" (650)	6" (150)	30" (750)	36" (900)	4" (100)	2	8	155.64
MI-LINT-6	20	200	67.5" (1688)	28" (700)	8" (200)	32" (800)	40" (1000)	6" (150)	3	12	213.80
MI-LINT-7	30	300	67.5" (1688)	28" (700)	10" (250)	44" (1100)	54" (1350)	6" (150)	3	12	302.26
MI-LINT-8	40	400	67.5" (1688)	30" (750)	12" (300)	54" (1350)	66" (1650)	6" (150)	3	12	404.91
MI-LINT-9	50	500	67.5" (1688)	40" (1000)	10" (250)	50" (1250)	60" (1500)	6" (150)	3	12	506.42
MI-LINT-10	75	700	91.5" (2288)	40" (1000)	8" (200)	54" (1350)	62" (1550)	6" (150)	4	16	868.65
MI-LINT-11	100	700	98" (2450)	50" (1250)	12" (300)	54" (1350)	66" (1650)	6" (150)	4	16	1017.35
MI-LINT-12	150	700	98" (2450)	50" (1250)	12" (300)	80" (2000)	92" (2300)	6" (150)	4	16	1536.00

Suffix	Description
-AL	Aluminum lid(s)
-AP	Anode pack
-BA	Minimum 51% material cost made in the USA
-C	Extension "C" as required
-CDF	Close down filter
-FL	Anchor flange
-FLC	Flow control fitting
-FLM	Anchor flange and membrane clamp

-HD	Heavy Duty load rated lids
-HLA	High level alarm
-RSSB	Replacement stainless steel baffle
-SB	Sediment bucket
-SS	Stainless steel cover shroud
-T	F.I.P. female threaded inlet and outlet
-TL	Lid (s) to receive tile or terrazzo
-VC	2" vent connection
<b>specify</b>	Special size inlet and outlet

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_  
 Section No: \_\_\_\_\_  
 Schedule No: \_\_\_\_\_

Page No: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Purchase Order No: \_\_\_\_\_