

1014-1012 MAVERICK™ 1.0



Elongated Front, SmartHeight™ Vitreous China, Two-Piece Toilet

FEATURES

- Uses 38% less water than conventional toilets
- High efficiency 1.0 gpf / 3.8 lpf low water consumption
- Elongated front SmartHeight™ bowl
- HET 3' flush valve
- Pilot operated anti-siphon fill valve
- 12" rough-in
- Model 79 chrome-plated, metal push button actuator
- 2" glazed trapway
- The Mansfield® limited lifetime warranty
- Available in White only



MODEL 1014-1012

Toilet seat not included






ELONGATED



SMARTHEIGHT ADA

COMPONENTS




MODEL #	DESCRIPTION	CODES/STANDARDS
1014-1012	Elongated front, SmartHeight™ two-piece toilet. Includes top chrome-plated, metal push button actuator. Less toilet seat and supply.	  
1014	Elongated front, SmartHeight™ toilet bowl only. Less toilet seat and supply.	
1012	Tank and cover only, with top metal push button actuator. Less supply.	
TANK TRIM & REPLACEMENT PARTS		
79	Chrome-plated, metal push button actuator	
209	Flush tower	
90-9000	Fill valve	
1012/3012-LID	Tank lid	

1014-1012 MAVERICK™ 1.0



Elongated Front, SmartHeight™ Vitreous China, Two-Piece Toilet

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
1014-1012	Elongated front, SmartHeight™ (1.0 gpf/3.8 lpf) two-piece toilet	  

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	3" Flush valve
WATER USAGE	1.0 gpf / 3.8 lpf
WATER SURFACE AREA	6-1/4' X 9'
ROUGH-IN	12'
MAP RATING	800 grams

TRAP DIAMETER	2'
TRAP SEAL	2-3/8'
SHIPPING WEIGHT	Model 1014 - 58 lbs. (26 kg) Model 1012 - 34 lbs. (15 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

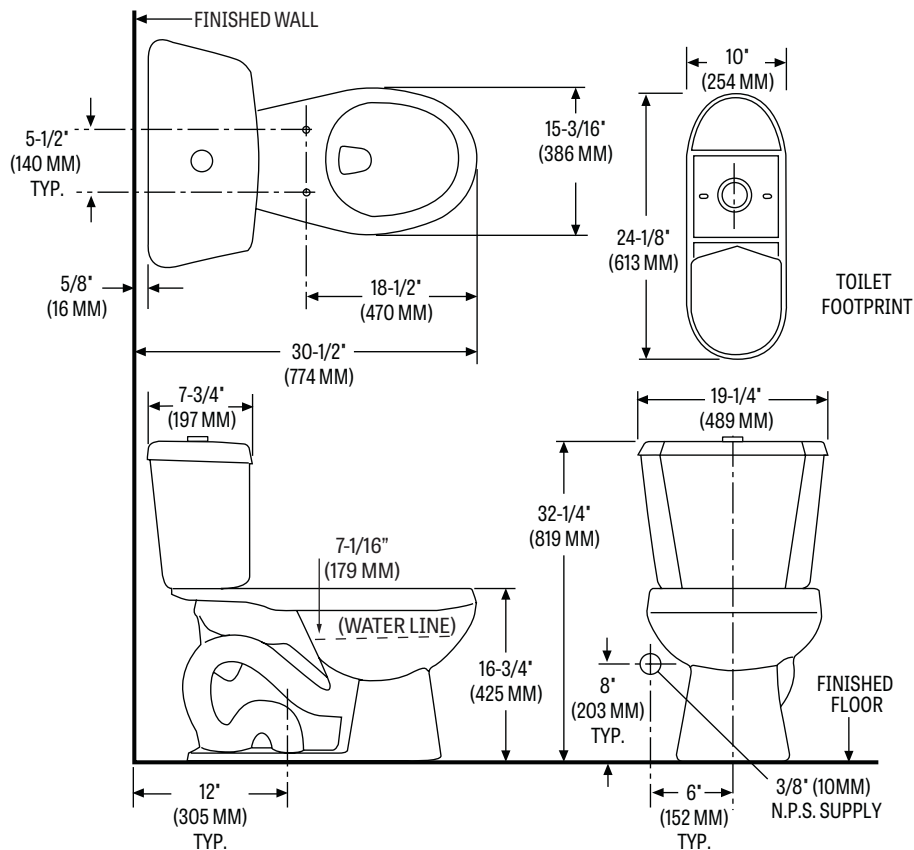

Fixture performance and specifications meet or exceed ASME A112.19.2-2013/CSA B45.1-13 standards, and other state and local codes.