

# 130CTK ProFit®1

Complete Toilet Kit, Round Front, Vitreous China, Two-Piece Toilet



## Features

- Complete toilet package
- 3 bolt tank-to-bowl connection
- 1.6 gpf / 6.0 lpf low water consumption
- Round front bowl
- 2" flush tower
- Anti-siphon ballcock
- Chrome trip lever
- 2" glazed trapway
- The Mansfield® limited lifetime warranty
- Available in White, Bone and Biscuit



Round Front



Model 130CTK

## Components

| Model #  | Description   | Codes/Standards |
|----------|---|-----------------|
| 130CTK   | Round front two-piece toilet kit. Includes: toilet seat, wax ring, floor bolts, caps, and multi-lingual installation instructions. Water supply hardware not included. Specify color. |                 |
| 130LTCTK | Same as above model, with lined tank and color match trip lever.  |                 |




**MADE IN USA**

## Specifications

| Model # | Description   | Codes/Standards |
|---------|---|-----------------|
| 130CTK  | Round front (1.6 gpf/6.0 lpf) two-piece toilet kit. |                 |

| Specification        | Description       | Specification   | Description   |
|----------------------|-------------------|-----------------|---|
| Material             | Vitreous China    | Trap Diameter   | 2"  |
| Water Pressure Range | 20 to 80 PSI      | Trap Seal       | 2-5/8"  |
| Flush System         | 2" flush tower    | Rough-in        | 12"   |
| Water Usage          | 1.6 gpf / 6.0 lpf | Shipping Weight | 85 lbs. / 38.2 kg   |
| Water Surface Area   | 8" X 9"           | Warranty        | Vitreous China - Limited Lifetime<br>Tank Trim - Limited One Year |
| MaP Rating           | 800 grams         |                 |   |

## Technical Information

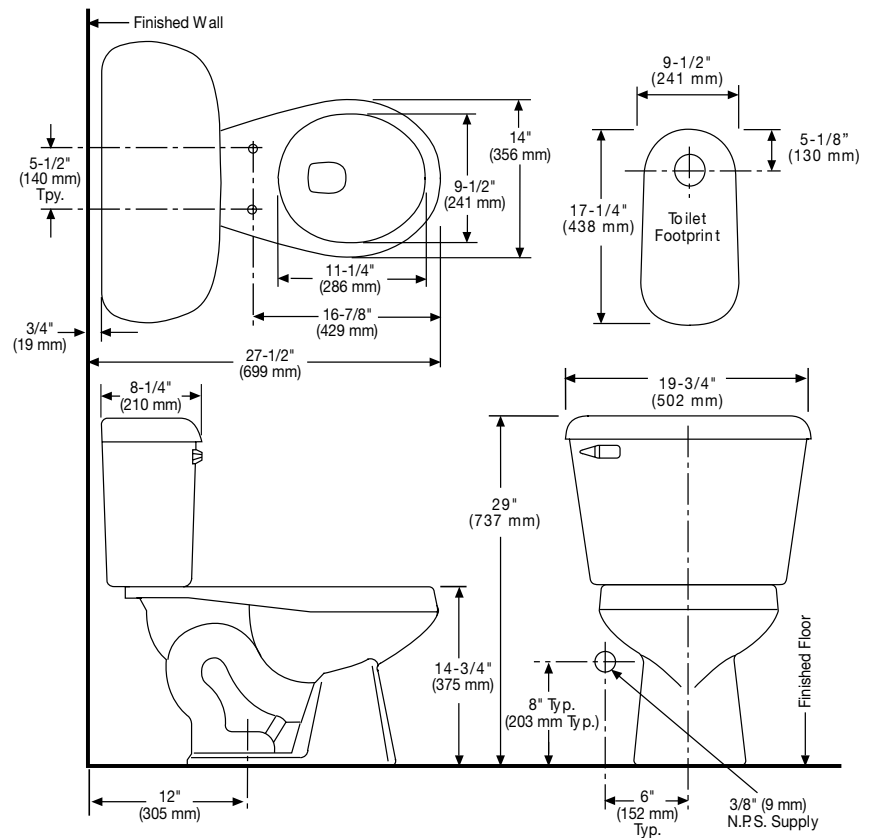

See our complete line of acrylic and vitreous china bathroom fixtures, plastic tank trim and plumbing products.

These dimensions are nominal and subject to change without notice.

Fixture performance and specifications meet or exceed ASME A112.19.2-2008/CSA B45.1-08 standards, and other state and local codes.



**MADE IN USA**