

# 4148-3147 BRENTWOOD®

# MANSFIELD®

Elongated Front, SmartHeight™ Vitreous China, Two-Piece Toilet

## FEATURES

- Concealed trapway for easier cleaning
- 1.6 gpf / 6.0 lpf low water consumption
- Elongated front, SmartHeight™ bowl
- Complies with ADA requirements for accessibility
- High performance MagnaFlush™ flushing technology
- 3" flush valve
- Pilot operated anti-siphon fill valve
- 12" rough-in
- Model 76 chrome-plated, metal trip lever
- 2" glazed trapway
- The Mansfield® limited lifetime warranty
- Available in White and Biscuit



**MODEL 4148-3147**

Toilet seat not included

Available as CTK



ELONGATED



SMARTHEIGHT ADA



CTK

## COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS
4148-3147	Elongated front, SmartHeight™, two-piece toilet. Less toilet seat and supply. Specify color.	 
4148	Elongated front, SmartHeight™ toilet bowl only. Less toilet seat and supply. Specify color.	
3147	Tank and cover only, with left hand, chrome-plated, metal trip lever. Less supply. Specify color.	

## TANK TRIM & REPLACEMENT PARTS

76	Trip lever - chrome-plated, metal trip lever, left hand
2206	Pilot operated fill valve
630-0207	Replacement flapper
3147-LID	Tank lid

# 4148-3147 BRENTWOOD®



Elongated Front, SmartHeight™ Vitreous China, Two-Piece Toilet


## SPECIFICATIONS

MODEL #	DESCRIPTION	CODES/STANDARDS
4148-3147	Elongated front, SmartHeight™ (1.6gpf/6.0 lpf) two-piece toilet	 

<b>MATERIAL</b>	Vitreous China	<b>TRAP DIAMETER</b>	2-1/4'
<b>WATER PRESSURE RANGE</b>	20 to 80 PSI	<b>TRAP SEAL</b>	2-1/2'
<b>FLUSH SYSTEM</b>	3' MagnaFlush™ flushing technology	<b>SHIPPING WEIGHT</b>	Model 4148- 52 lbs. (23 kg) Model 3147- 39 lbs. (18 kg)
<b>WATER USAGE</b>	1.6 gpf / 6.0 lpf	<b>WARRANTY</b>	Vitreous China - Limited Lifetime Tank Trim - Limited One Year
<b>WATER SURFACE AREA</b>	7' X 9-1/4'		
<b>ROUGH-IN</b>	12'		
<b>MAP RATING</b>	800 grams		

## TECHNICAL INFORMATION

**Note:** these dimensions are nominal and subject to change without notice.

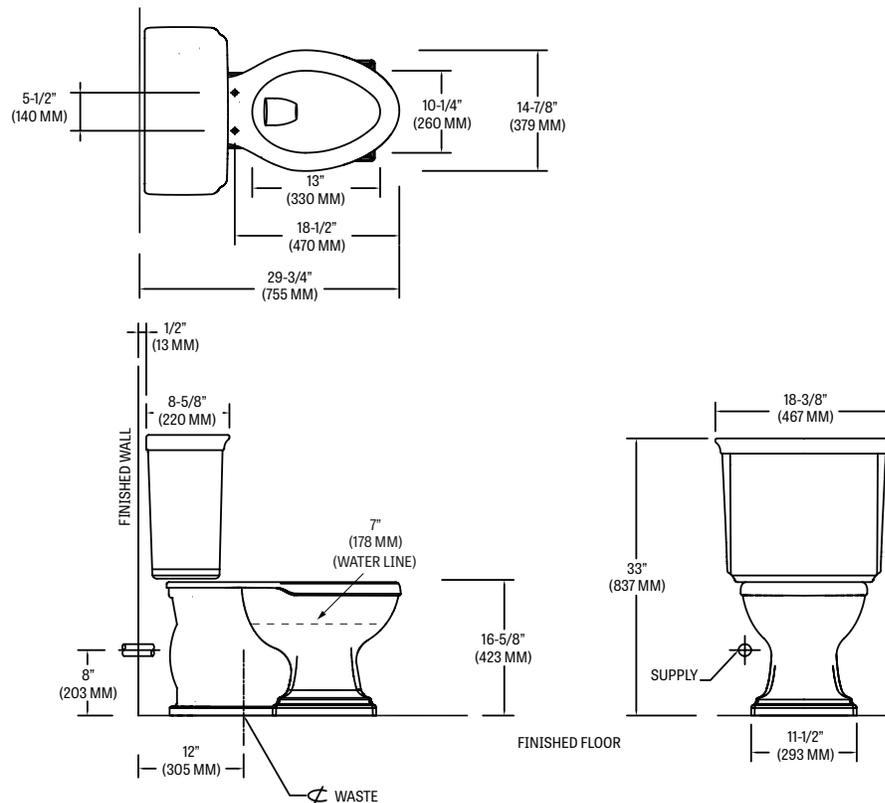

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.