



Hose Bibbs

125 lb. CWP to 100°F Maximum Temperature 180°F

| QUARTER TURN HOSE BIBBS MATERIALS LIST | | | | |
|--|-----------------------------|--|--|--|
| PART | SPECIFICATION | | | |
| Screw | Steel | | | |
| I.D. Tag | Aluminum | | | |
| Handle | Zinc | | | |
| Stem | Brass ASTM B 16 UNS C36000 | | | |
| O-Ring | Nitrile | | | |
| Seat | PTFE | | | |
| Ball | Brass ASTM B 16 UNS C36000 | | | |
| Adapter | Brass ASTM B 283 UNS C37700 | | | |
| Body | Brass ASTM B 283 UNS C37700 | | | |



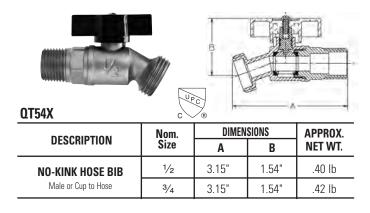



1.54"

.42 lb


3.11"


QT56X

NO-KINK HOSE BIBB

1/2 Cup or 3/4 Ftg. to Hose

| DECODIDITION | Nom. Size | DIMENSIONS | | APPROX. |
|---|--------------|------------|-------|---------|
| DESCRIPTION | | Α | В | NET WT. |
| HOSE BIBB Cup or Male to Hose Male Thread to Hose | 1/2 | 3.15" | 2.17" | .40 lb |
| | 3⁄4 | 3.15" | 2.14" | .42 lb |

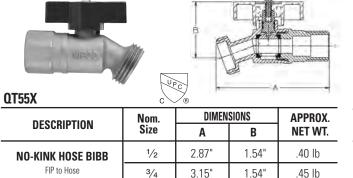



1/2" or 3/4"

MARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

NOT FOR USE WITH POTABLE DRINKING WATER APPLICATIONS AFTER JANUARY 3, 2014.