


**WM-442-CHV**

**WM-442-ADA**

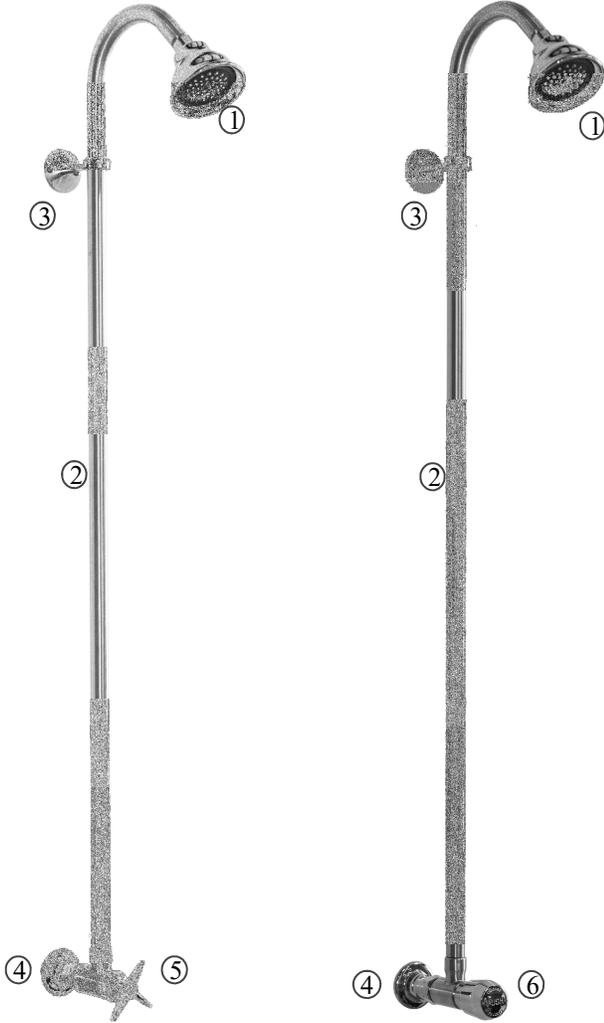

**WM-442 PARTS LIST**

1) DEL-78	1.75 GPM Chrome Plated Head
2) SR-41-120	½"x 41" 304 sch40 Stainless Steel Riser
3) WB-3	3" Stainless Steel Wall Bracket & Flange w/Stainless Steel Screws (2)
4) WJK-CP	Straight Supply Arm with Flange
5) AV-CH-SS	Cross Handle Stainless Steel Angle Valve (replacement valve for WM-442-CHV)
6) AV-ADA-SS	Metered Push Handle Stainless Steel Angle Valve (replacement valve for WM-442-ADA)

Accessories may vary due to availability and slight modifications by the manufacturer.

Additional options/accessories are available and shown on page 3.

**Installation Guidelines**

- Recommended Water Supply Line from flooring surface: 40-42"
  - Recommended Shower Head Height: 77-79"
1. Bring ½" water supply line out of wall leaving 1" of exposed pipe threads.
  2. Attach the WJK-CP Supply Arm to the water supply line.
  3. Slide mounting bracket onto riser.
  4. Attach shower riser to angle valve using Teflon tape on threads.
  5. Connect angle valve to WJK-CP making sure provided washer is used.
  6. Using a level or plumb line, mark placement holes for mounting bracket.
  7. Pre-drill previously marked holes for placement of mounting bracket.
  8. Secure mounting bracket to wall with stainless steel screws.
  9. Tighten set screw on ring of mounting bracket.
  10. Attach Shower Head to Riser. Teflon tape is not needed.

WALL MOUNT COLD WATER—WM-442-ADA / WM-442-CHV



www.outdoorshowerco.com  
1-866-shower1 (746-9371)  
info@outdoorshowerco.com


WM-442-ADA  
WM-442-CHV

WM-442-CHV  
FRONT VIEW

WM-442-CHV  
SIDE VIEW

WM-442-ADA  
FRONT VIEW

WM-442-ADA  
SIDE VIEW

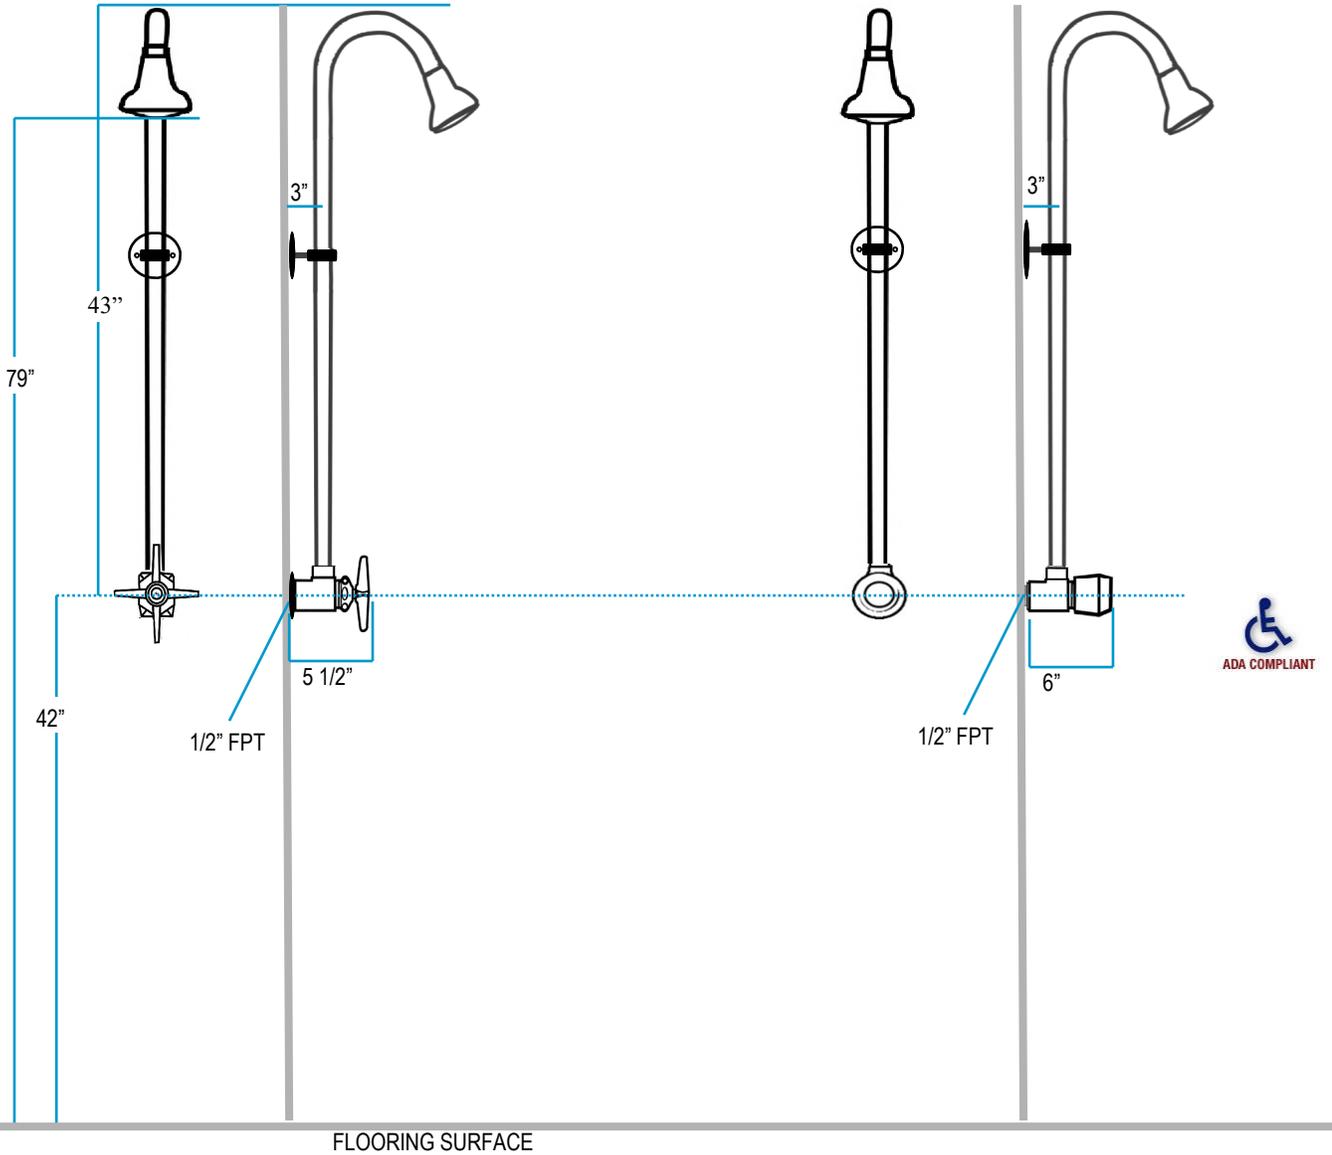

**TECHNICAL DATA:**

- WALL MOUNT UNIT
- STAINLESS STEEL ANGLE VALVE
- 1/2" x 41" 304 STAINLESS STEEL SCH 40 RISER
- 1.75 GPM CHROME PLATED SHOWER HEAD
- STAINLESS STEEL RING BRACKET
- STAINLESS STEEL SCREWS