


## Pfirst Series™ Kitchen Faucet

- G135-7000 Finish(C)
- G135-700S Finish(C)
- G135-8000 Finish(C)
- G135-800S Finish(C)



### Specifications

#### Features

- 1.8 GPM Flow Rate
- Includes Metal Supply Nuts
- 3-Hole Installation (700\* Only)
- 4-Hole Installation (800\* Only)
- 360° Swivel Spout
- Includes Matching Side Spray (800\* Only)
- Quick Connect Side Spray (800\* Only)
- Chrome Spray (only for 8000 Only)
- Stainless Steel Side Spray (800S Only)
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®

- 3 or 4-Hole Installation
- Pforever Seal


#### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)



### Dimensions

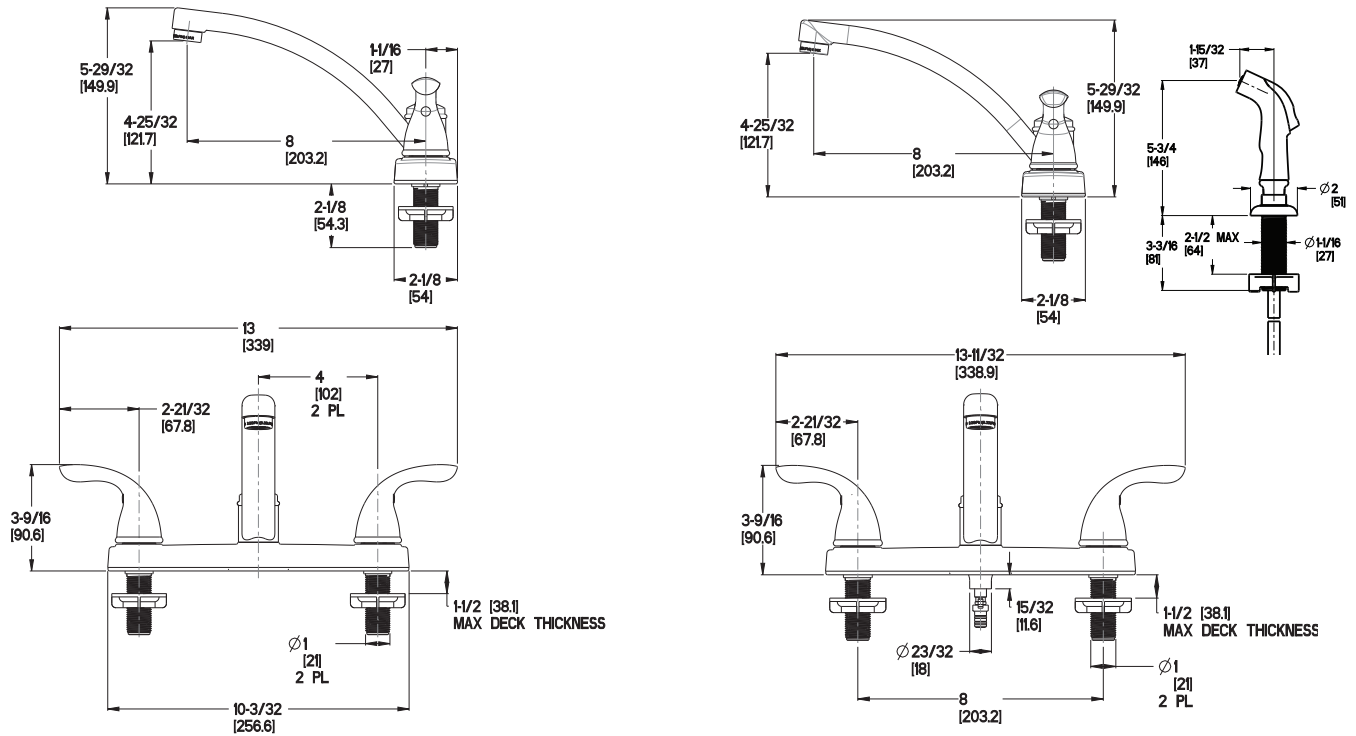

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings