


## H423-V 3 Mode Hand Shower Unit Installation Guide




Model Numbers	Feature Highlights
□ H423-V 3 Mode Hand Shower Unit	<ul> <li>3 mode hand shower</li> <li>3-3/4" diameter hand shower head</li> </ul>
Options/Modifications	<ul> <li>In-line vacuum breaker for backflow protection</li> <li>30" slide bar with cradle for hand shower mounting</li> <li>60" flexible metal hose</li> <li>Standard 2.5 gpm (9.5 L/min) flow restrictor</li> <li>Shall be metal and nonmetallic construction, plated in standard polished chrome finish</li> </ul>
□       -1.5 CG       1.5 gpm (5.7 L/min) flow restrictor         □       -2.0       2.0 gpm (7.6 L/min) flow restrictor         □       -STN       Satin Nickel finish	
<b>Note:</b> Append appropriate -suffix to model number.	Warranty
Compliance	Limited Lifetime - to the original end purchaser in
- ASME A112.18.1/CSA B125.1	consumer installations. <b>5 Years</b> - for commercial installations. Refer to www.symmons.com/warranty for complete warranty information.


## **Dimensions**

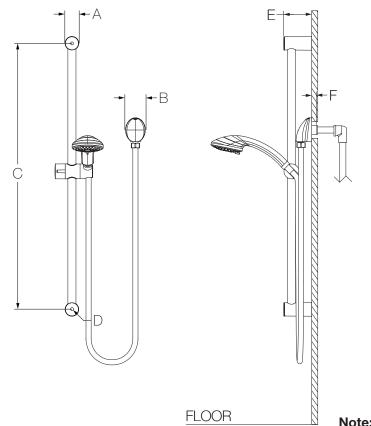

**Measurements** Ø 1-1/2", 38 mm А В 2-1/8", 54 mm 28-9/16", 725 mm С (2x) Hole Size: D Ø 1/4", 6 mm 3", 76 mm Е Male 1/2-14 NPT fitting must F be recessed 1/4" (6 mm) from finished wall



## Parts Breakdown

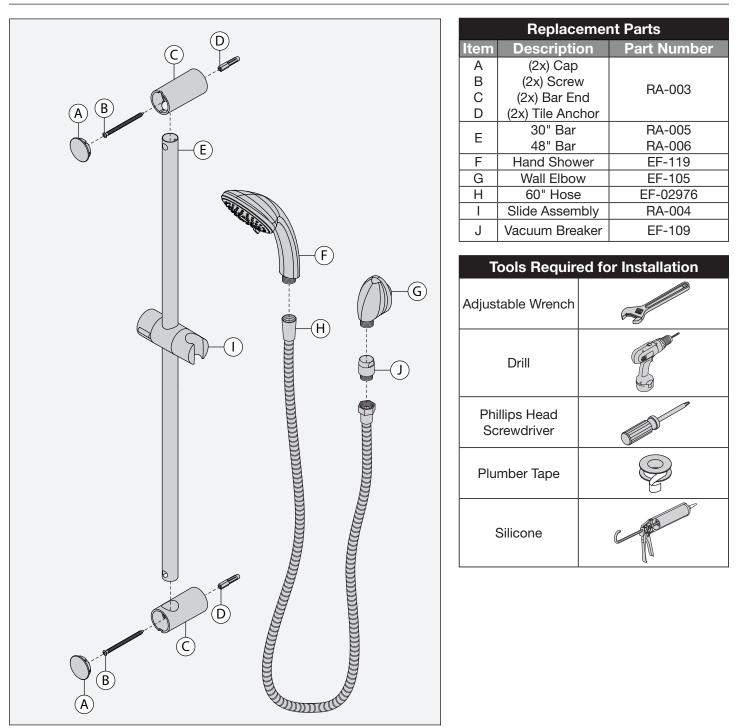

## Notes:

- 1) Apply a bead of silicone around the perimeter of all shower trim installed flush to the finished wall.
- 2) Apply plumber tape to all threaded connections.

**WARNING:** This product can expose you to chemicals including lead, which is known to the state of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.