

Kitchen Faucet S-248 Specification Submittal





Feature Highlights

- Origins Two Handle Kitchen Faucet with quarter turn ceramic control components
- 8-5/8 inch swing spout with aerator
- 1/2 inch IPS shanks, 8 inch centers
- Metal contruction
- Polished chrome finish (standard)
- Aerator with 2.2 gpm flow rate (8.3 L/min)

 Optional aerator available in lower flow rates

Standards / Certifications

ASME A112.18.1/CSA B125.1

ADA compliant lever handles





Warranty

- Limited Lifetime to the original end purchaser in residential / consumer installations
- 5 years for commercial installations

S-248 Faucet Handle Options				
S-248-1-LAM	S-248-LAM	S-248-LPO	S-248-LWG	S-248 (blade)
			3	E. Company of the com

Model Numbers

Requires appropriate handle selection

 \square S-248-2 Faucet with swing spout, aerator, hose and

handspray

☐ S-248-1 Faucet with swing spout and swivel spray

aerator

☐ S-248 Faucet with swing spout

Handle Selection

Requires selecting handle and appending -suffix code as appropriate

- ☐ -LAM Metal insert lever handles
- □ -LPO White insert lever handles
- ☐ -LWG Wrist blade handles
 - (-) Blade handles (no suffix code letters appended to model number)

Finish Options / Modifications


Append appropriate -suffix to model number


- Polished chrome (standard)
- □ -STN Satin nickel


Options / Modifications

Append appropriate -suffix to model number

- ☐ GG -0.5 Aerator flow restrictor, 0.5 gpm (1.9 L/min)
- GG -1.0 Aerator flow restrictor, 1.0 gpm (3.8 L/min)
- ☐ G -1.5 Aerator flow restrictor, 1.5 gpm (5.7 L/min)
- □ -VP Vandal resistant aerator, 2.2 gpm (8.3 L/min)
 - -NA Non-aerated laminar flow outlet, flow rate 2.2 gpm (8.3 L/min)

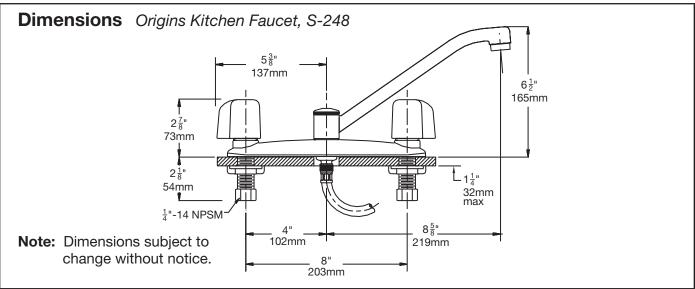

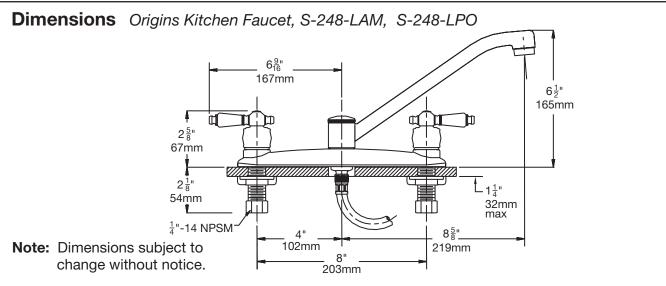

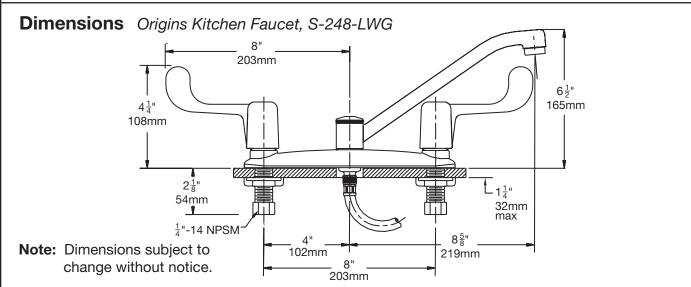

Symmons Industries, Inc. • 31 Brooks Drive • Braintree, MA 02184

Phone: (800) 796-6667 Fax: (800) 961-9621

Website: symmons.com ■ Email: gethelp@symmons.com

