

TS111B8

Modern Series Aero Rain Shower

FEATURES

- Air injected and pulsating AeroJet+™ techonology
- 2.5 gpm (9.5 lpm) maximum flow rate
- 8" diameter spray face
- Rubber nozzles to prevent limescale build up



COLORS/FINISHES

#CP Polished Chrome #BN Brushed Nickel #PN Polished Nickel

CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others



PRODUCT SPECIFICATION

The show shall have air injected and pulsating Aero-Jet+ technology. Product shall have 2.5 gpm (9.5 lpm) max. flow rate. Product shall have 8" diameter spray face. Product shall have rubber nozzels to prevent limescale build up. Product shall be **TOTO Model TS111B8#____**.

Please note the following components are sold separately:



TS110MV16 Shower Arm Wall Mount



TS110MC6 Shower Arm Ceiling Mount

Modern Series Aero Rain Shower

SPECIFICATIONS

- Lifetime Limited Warranty Warranty • (Residential Use)
- Material .


One Year (Commercial Use) Brass


- Shipping Weight 4.3 lbs.
- Shipping Dimensions
- 13-1/8" x 14-1/8" x 4-1/4" Maximum Flow Rate 2.5 gpm (9.5 lpm)



Required Components:

- TS110MV16 (Wall Mount Shower Arm)
- TS110MC6 (Ceiling Mount Shower Arm)

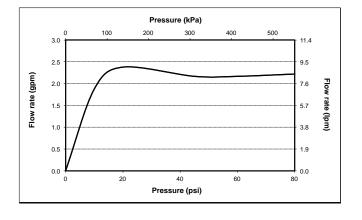

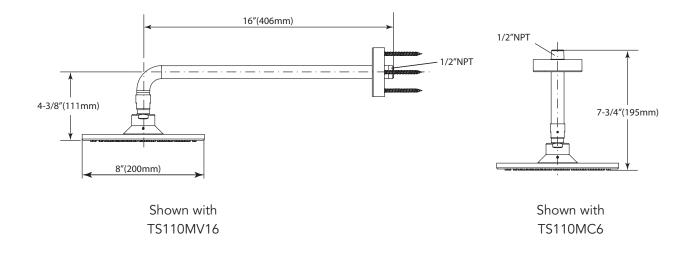

TOTO

These dimensions and specifications are subject to change without notice