For Residential and Commercial Applications					
Job Name		Engineer / Architect			
Job Location		Wholesaler			
Submittal Date		Contractor			

## PLB107/116X 1/4 Turn Angle Stop - Cold Expansion Barb x Compression

Use: For use only in potable water distribution systems, hot and cold, in accessible locations only

Part Listing:

PLB107X B	1/2" nom cold expansion barb (for PEX) x 3/8" OD compression, chrome plated, bulk
PLB107X P	1/2" nom cold expansion barb (for PEX) x 3/8" OD compression, chrome plated, bagged
PLB116X P	1/2" nom cold expansion barb (for PEX) x 1/4" OD compression, chrome plated, bagged




STOP MATERIAL SPECIFICATIONS				
Body	Brass, plated			
Stem	Brass			
Ball	Brass, plated			
Seats	PTFE			
O-ring	Rubber			
Handle	ABS, plated			
Handle Screw	Stainless steel			
Compression Nut	Brass, plated			
Compression Sleeve	Brass			
Adaptor	Brass, plated			


Operating Specifications				
Temperature	Pressure			
40°- 160° F	125 PSI maximum			

## PLB107/116X

## 1/4 Turn Angle Stop - Cold Expansion Barb **x** Compression

PART DIMENSIONS (Inches)								
Model	DIM. A	DIM. B	DIM. C	DIM. D	DIM. E	DIM. F		
PLB107X	2.02	1.77	2.41	1.12	1.25	.94		
PLB116X	2.02	1.77	2.41	1.12	1.25	.94		



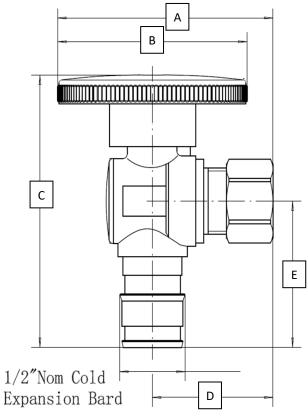

## **Listings & Certifications:**

■ IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI 372 and NSF/ANSI/CAN 61)



